

17

construction
engineering
research
laboratory




United States Army
Corps of Engineers
Serving the Army
Serving the Nation

TECHNICAL REPORT N-131
June 1982
Integrated Installation Noise Contour System

AD A118796

OPERATIONAL NOISE DATA FOR UH-60A AND CH-47C
ARMY HELICOPTERS

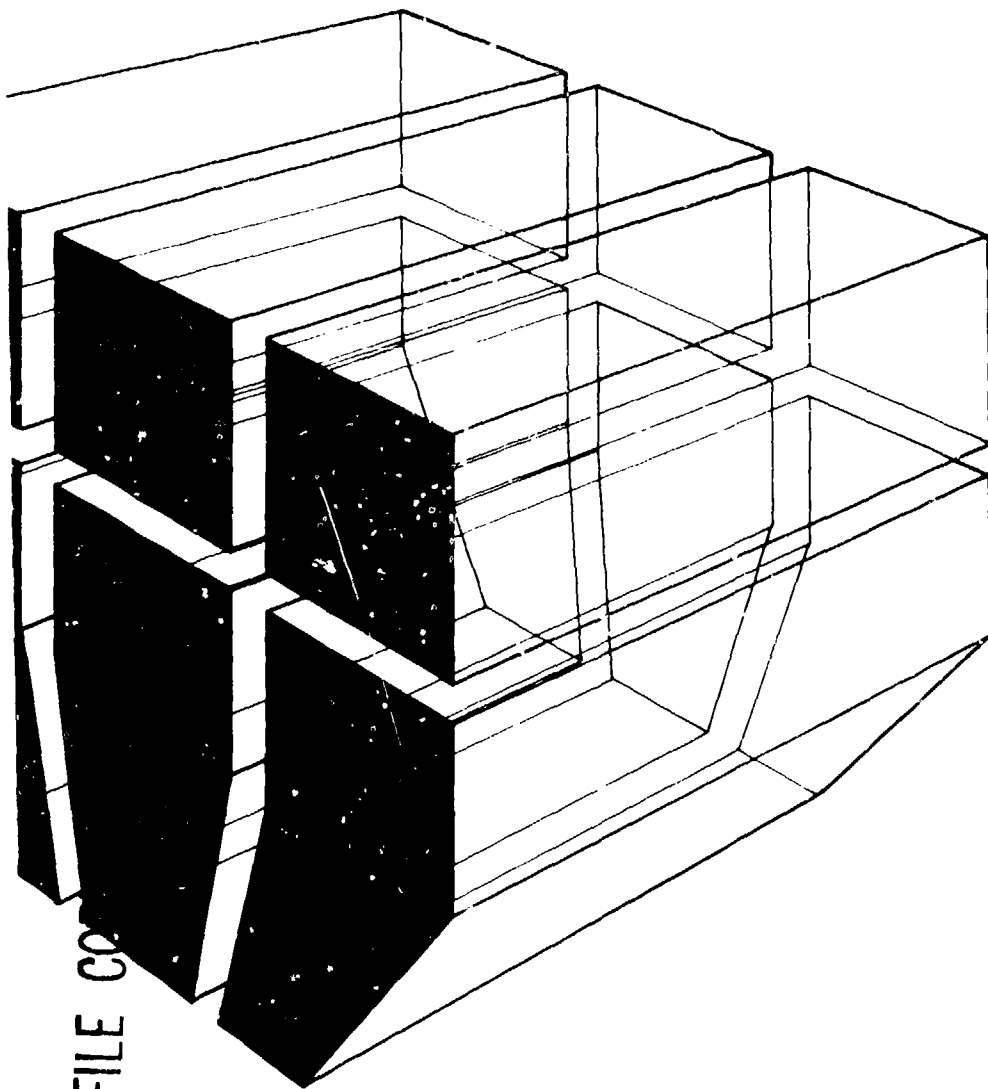

by
P. D. Schomer
Aaron Averbuch
Richard Raspet

DTIC
SELECTED
S AUG 31 1982 D
A



DTIC FILE CO

Approved for public release; distribution unlimited.

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official indorsement or approval of the use of such commercial products. The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

***DESTROY THIS REPORT WHEN IT IS NO LONGER NEEDED
DO NOT RETURN IT TO THE ORIGINATOR***

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER CERL-TR-N-131	2. GOVT ACCESSION NO. AD-A118796	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) OPERATIONAL NOISE DATA FOR UH-60A AND CH-47C ARMY HELICOPTERS		5. TYPE OF REPORT & PERIOD COVERED FINAL
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) P. D. Schomer Aaron Averbuch Richard Raspet		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. ARMY CONSTRUCTION ENGINEERING RESEARCH LABORATORY P.O. BOX 4005, CHAMPAIGN, IL 61820		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 4A762720A896-A-011
11. CONTROLLING OFFICE NAME AND ADDRESS		12. REPORT DATE June 1982
		13. NUMBER OF PAGES 42
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Copies are obtainable from the National Technical Information Service Springfield, VA 22151		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Helicopters noise (sound) aircraft noise sound exposure level		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The objectives of this study were to develop sound exposure level (SEL) versus distance curves for the UH-60A and CH-47C Army helicopters, to investigate the variation of SEL with aircraft speed, and to confirm the validity of the measurement procedures by comparing data obtained for UH-1H helicopters at Forts Campbell and Rucker. Sound levels produced by the helicopters were measured for heavily and lightly loaded aircraft which were hovering and traveling at various speeds and distances.		

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

BLOCK 20. (Continued)

→ The data show that a heavily loaded UH-60A is about 2 dB louder than a lightly loaded one. Landing noise with the UH-60A and CH-47 is substantially greater than for level flyover. The variation of SEL with speed is rather modest, except for aircraft at very low or very high speeds. The results for the UH-1H at Forts Campbell and Rucker did not compare as favorably as expected. Various factors, including maintenance procedures and the surface of the test area, may have contributed to the discrepancies. ↗

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

CONTENTS

	Page
DD FORM 1473	1
FOREWORD	3
LIST OF TABLES AND FIGURES	5
1 INTRODUCTION	9
Background	
Objective	
Approach	
Mode of Technology Transfer	
2 COLLECTION OF DATA	10
Helicopter Operations	
Microphone Placement	
Measurement Instrumentation	
Ground Tracking System	
Calibration	
3 DATA REDUCTION AND ANALYSIS	11
Raw Data	
Reduction of Dynamic Operation Data	
Data Analysis	
4 RESULTS AND DISCUSSION	13
Sound Exposure Level Versus Distance	
Hover Data	
Variation of Sound Exposure Level With Speed	
Comparison of Fort Campbell and Fort Rucker Results for the UH-1H Aircraft	
5 CONCLUSIONS AND RECOMMENDATIONS	16
TABLES AND FIGURES	16
METRIC CONVERSIONS	32
APPENDIX A: Pilot's Log	33
APPENDIX B: Hover Data	38
APPENDIX C: Data for Figures 8 Through 22	41
DISTRIBUTION	

TABLES

Number	Page
1 Dynamic Operations Performed at Fort Rucker	16
2 Helicopter Types and Loading Conditions Measured at Fort Rucker	16
3 Dynamic Operations Performed at Fort Campbell by CH-47C and UH-1H	17
4 Average (Energy) Measured Data	17
5 Hover Directivity Versus Position	18
6 Energy Average A-Weighted Hover Sound Levels	18
7 Difference, in Decibels, Between Composite Speed Variation Functions	18
8 Comparison of Fort Campbell and Fort Rucker UH-1H Data	19
B1 UH-1H Hover Data	38
B2 UH-60A Hover Data—Unloaded	38
B3 UH-60A Hover Data—Loaded	38
B4 CH-47C Hover Data	38
B5 Energy Averages of Fort Campbell Single-Rotor Aircraft by Degrees With Respect to the Aircraft (0° Is Front of Aircraft); Table B1 Through B3 Data	39
B6 Difference From Average; Table B5 Data	39
B7 Weighted Average of Single-Rotor Aircraft Directivity Change	39
B8 Energy Averages of Fort Campbell Dual-Rotor Aircraft by Degrees With Respect to the Aircraft (0° Is Front of Aircraft); Table B4 Data	39
B9 Difference From Average; Table B8 Data	39
B10 Weighted Average of Dual-Rotor Aircraft Directivity Change	40
C1 Variation of SEL With Distance at 100 Knots (Figures 8 and 9)	41
C2 Variation of SEL With Speed at 500 ft (Figures 10 through 13)	41
C3 Variation of L_{eq} With Speed at 500 ft (Figures 14 through 17)	41

TABLES (cont'd)

Number		Page
C4	Variation of SEL + 10 log (v/100 Knots) With Speed at 500 ft (Figures 18 Through 21)	42
C5	Difference of L_{eq} With Speed Versus SEL + 10 log (v/100 Knots) With Speed at 500 ft (Figure 22)	42

FIGURES

1	Flight Path for Level Flyovers	20
2	Flight Path for Landing	20
3	Microphone/Camera Layout at Fort Campbell	21
4	Hover Microphones at Fort Campbell	21
5	Sideline Microphones at Fort Campbell	22
6	Directivity Effects—300 ft AGL	23
7	Directivity Effects—1000 ft AGL	23
8	UH-60A—Variation of SEL With Distance, Level Flyover	24
9	CH-47C—Variation of SEL With Distance, Level Flyover	24
10	CH-47C—Variation of SEL With Speed at 500 ft	25
11	UH-1H—Variation of SEL With Speed at 500 ft	25
12	UH-60A—Variation of SEL With Speed at 500 ft	26
13	Composite Curves of Variation of SEL With Distance at 500 ft	26
14	CH-47C—Variation of L_{eq} With Speed at 500 ft	27
15	UH-1H—Variation of L_{eq} With Speed at 500 ft	27
16	UH-60A—Variation of L_{eq} With Speed at 500 ft	28
17	Composite Curves of Variation of L_{eq} With Speed at 500 ft	28
18	CH-47C—Variation of SEL + 10 log (v/100 Knots) With Speed at 500 ft	29
19	UH-1H—Variation of SEL + 10 log (v/100 Knots) With Speed at 500 ft	29

FIGURES (cont'd)

Number		Page
20	UH-60A--Variation of SEL + 10 log (v/100 Knots) With Speed at 500 ft	30
21	Composite Curves of Variation of SEL + 10 log (v/100 Knots) With Speed at 500 ft	30
22	Difference of L_{eq} Versus Speed and SEL + 10 log (v/100 Knots) at 500 ft	31
23	UH-1H--Variation of SEL With Distance at 80 Knots (Level Flyovers)	31
24	UH-1H--Variation of SEL With Distance at 80 Knots (Landings)	32
A1	Instruction Sheet for a Level Flyover--Operation 14	34
A2	Pilot's Entries for Level Flyover	34
A3	Instruction Sheet for Landing--Operation 15	35
A4	Pilot's Entries for Landing	35
A5	Instruction Sheet for Hovers--Operations 16 and 17	36
A6	Pilot's Entries for Hovers	36
A7	Instruction Sheet for Takeoff--Operation 18	37
A8	Pilot's Entries for Takeoff	37

OPERATIONAL NOISE DATA FOR UH-60A AND CH-47C ARMY HELICOPTERS

1 INTRODUCTION

Background

In recent years, residential development has occurred near military and civilian airfields—areas subject to high noise levels from aircraft and airfield operations. To control this development, the U.S. Army has instituted the Installation Compatible Use Noise Zone Program (ICUZ).¹ Like the Department of Defense's (DOD) *Construction Criteria Manual* and *Air Installation Compatible Use Zone* program (AICUZ), the ICUZ program defines land uses compatible with various noise levels and establishes a policy for achieving such uses.² Each document describes three noise zones which restrict land use in varying degrees to ensure compatibility with military operations. The ICUZ program stresses Army-unique noise sources such as blasts (e.g., artillery, armor, demolition) and rotary-wing aircraft.

Noise zone maps for the ICUZ program are developed by the Army Environmental Hygiene Agency (AEHA) using U.S. Army Construction Engineering Research Laboratory's (CERL's) integrated noise contour system (INCS). This system can produce joint noise zone maps for blast noise and fixed- and rotary-wing aircraft operations. Noise zone maps are produced using the CERL-developed BNOISE-3.2 computerized prediction procedure; helicopter noise zone maps are developed using a CERL-modified Air Force NOISEMAP Computer Prediction Program.³ Each of these computerized prediction procedures relies on three separate data sources: (1) source emissions data, (2) data detailing sound

¹"Installation Compatible Noise Use Zones" (Department of the Army, Office of the Adjutant General, 20 May 1981).

²*Construction Criteria Manual*, DOD 4270.1-M (Department of Defense, 1972); *Air Installations Compatible Use Zones*, DOD Instruction 4165-57 (Department of Defense, 1973).

³Lincoln L. Little, Violetta I. Pawlowska, and David L. Effland, *Blast Noise Prediction Volume II: BNOISE 3.2 Computer Program Description and Program Listing*, Technical Report N-98/ADA099335 (U.S. Army Construction Engineering Research Laboratory [CERL], 1981); R. D. Horonjeff, R. R. Kandukuri, and N. H. Reddingius, *Community Noise Exposure Resulting From Aircraft Operation: Computer Program Description*, Air Force Report AMRL TR-73-109/ADA004621 (1974).

propagation from source to receiver, and (3) data defining the human and community response to the received noise.

Previous CERL research has addressed, to some degree, these sets of data for rotary-wing aircraft and for blast noise prediction. In particular, CERL Technical Report N-38 defines the noise emission characteristics for rotary-wing aircraft operating in the Army fleet during the late 1970s.⁴ Since then, the new UH-60A and CH-47C helicopters have been introduced; their emissions data are required by the Army for ICUZ and for environmental assessment.

Objective

The objectives of this study were: (1) to develop sound exposure level (SEL) versus distance curves for the new Army aircraft, (2) to investigate the variation of SEL with aircraft speed, and (3) to confirm the validity of the measurement procedures.

Approach

To accomplish these objectives, the basic approach was to use as much as possible the microphone types and layout, recording method, and analysis procedures employed in April 1974 at Fort Rucker.⁵ Chapter 2 details the collection of data and specifically highlights changes from the 1974 procedures; Chapter 3 describes the data analysis.

To help confirm the validity of the measurement procedures, data were also gathered on the UH-1H at Fort Campbell for comparison with the 1974 measurements for this aircraft at Fort Rucker. Similar results from the two studies would show that the measurement procedures were independent of site, or that the operational/pilot technique or other factors had not changed in the 6 years between the two measurement periods. Chapter 4 discusses this comparison and presents the basic results.

Mode of Technology Transfer

Data developed for helicopter SEL versus distance or speed will be entered in the INCS input data base and will be immediately available for use by AEHA and other DOD installations.

⁴B. Homans, L. Little, and P. Schomer, *Rotary Wing Aircraft Operational Noise Data*, Technical Report N-38/ADA 051999 (CERL, 1978).

⁵B. Homans, L. Little, and P. Schomer, *Rotary Wing Aircraft Operational Noise Data*, Technical Report N-38/ADA 051999 (CERL, 1978).

2 COLLECTION OF DATA

Helicopter Operations

At Fort Rucker, one set of data was based on the dynamic operations listed in Table 1. Forty helicopters took part in that study; each aircraft flew the series of operations twice: once with the pilot and once with the co-pilot. Table 2 lists the aircraft types and conditions employed. The Fort Rucker study indicated that level flyover data and landing data adequately characterized the noise emissions of all other dynamic operations. Therefore, the study at Fort Campbell concentrated only on level flyovers and landings.

At Fort Rucker, cargo and utility aircraft were flown lightly loaded and fully loaded. At Fort Campbell, this condition varied with aircraft type. The UH-1H and CH-47C were flown lightly loaded only. Table 3 lists the operations performed by these helicopters. The aircraft began by flying level flyovers with headings of either 100 degrees or 280 degrees at 300 ft above ground level (AGL). In the middle of the test, they performed two hover operations, and then resumed level flyovers, but this time at an altitude of 1000 ft AGL. Two aircraft of each type were used, each with a different pilot. The aircraft performed the 300-ft-AGL operations, the landing, the two hovers, and as many of the 1000-ft-AGL operations as they could before returning to base for fuel. The operations and procedures (as well as the measurement equipment described below) were designed to investigate the change in SEL with speed and distance, and to establish noise emissions data for the CH-47C and the UH-60A.

The tests with the UH-60A were different in that the aircraft was flown both lightly loaded and more fully loaded. To load the UH-60A, its sling was used to carry a full 500-gal water buffalo. Two UH-60A aircraft performed only operations 1 through 17 from Table 3—once lightly loaded and once heavily loaded. The UH-60A aircraft were not flown at 1000 ft AGL.

The level flyovers at Fort Campbell were flown similarly to those at Fort Rucker. The pilots were instructed to maintain straight, level, steady flight for at least 1.5 nautical miles before and after each dynamic operation. All teardrop turns, other ancillary maneuvers, and preparations for the actual dynamic operation were performed beyond 1.5 nautical miles. Flying this distance allowed the pilot to stabilize the aircraft and provided enough time for 10 dB down-sound-level points to be recorded on magnetic tape when the operation

was flown at 300 ft AGL. Figure 1 illustrates the level flyover flight path. Operation 15, a normal landing (Figure 2), began at 300 ft AGL on a ground track of 280 degrees. The aircraft landed 800 ft west of the east end of the microphone array (Figure 3).

Static operations consisted of in-ground and out-of-ground effect hovers. These measurements were performed largely over a grassy surfaced area (Figure 4). In-ground effect hovers were performed with the aircraft at a stabilized position between 0 and 5 ft above the ground. The aircraft maintained the stabilized position by always facing into the wind. Out-of-ground hovers were performed at an altitude of 1 rotor diameter.

The pilots recorded in logs information about each operation flown. Typical entries from a pilot's log are shown in Appendix A.

Microphone Placement

A basic array of six microphones was used at Forts Rucker and Campbell (Figure 3). (Four additional sideline microphones were located at Fort Campbell for a future analysis of helicopter sound exposure level attenuation with distance [Figure 5].)

Hover measurements were performed at point H on Figure 4. The hover measurement positions formed a 400-ft-radius curve around the hover position. Measurements were made at eight equally spaced points on the hover circle. Three points were part of the six-microphone array, and five points were special manned stations used only during the hover operation.

Measurement Instrumentation

As at Fort Rucker, the main acoustic instrumentation at Fort Campbell consisted of six B&K 4149 ½-in. quartz-coated microphones. Newer B&K 4921 outdoor microphone systems with silk windscreens were used in place of the older B&K 141 field amplifiers used at Fort Rucker. The six microphones were wired to an equipment van. As at Fort Rucker, each microphone signal was received, amplified by a Neff 119 DC amplifier, split, and recorded on a 14-channel FM tape recorder. At Fort Campbell, Ampex PR 2200 recorders were used in place of the older FR 1300 recorders. Rather than split the signal at 707 Hz as was done at Fort Rucker (a procedure which gained no more than 6 dB in dynamic range of the high frequencies), it was decided to split the recording into a high gain and low gain channel to increase the dynamic range.

Time synchronization was handled by a Systron Donner 8350 time code generator which occupied one tape recorder channel. The remaining data channel on the Ampex recorder was used for wind speed and wind direction information.

The recordings for hover measurements were made simultaneously by using three of the six permanent microphones and five identical portable systems manned by five individuals. Each of the portable systems consisted of a B&K 4145 1-in. condenser microphone powered by a B&K 2209 sound level meter. These systems recorded from the AC output of the sound level meter onto a Nagra DJ full-track portable scientific tape recorder which was set to run at 7-½ ips. In a departure from the Fort Rucker procedures, no recordings at Fort Campbell were made at the 1.5 ips speed.

Ground Tracking System

The tracking system used at Fort Campbell was very similar to that at Fort Rucker. Two cameras and a theodolite (Figure 3) marked the position of an aircraft flying over the middle of the microphone array. Camera 1 was placed 500 ft south of microphone array, and camera 2 was placed at the east end of the runway next to microphone 4. Stator poles in front of the camera positions were marked with uniform graduations. By examining photographs from both cameras, one could ascertain position information in three dimensions at the moment the pictures for the 300-ft-AGL test were taken. For the 1000-ft-AGL operations, only camera 2 was used. Two additional stator poles were used to determine the lateral deviation of the aircraft (north or south) from the desired flight line. Pictures were taken remotely by an operator who could see when the aircraft were precisely over the east-west middle of the measurement array. The helicopters' altimeters guaranteed that the aircraft were close enough to 1000 ft AGL for this study.

A bus system connected the cameras with the van and the theodolite. When a picture was taken from either camera, both cameras were fired and wind direction information on the Ampex 14 track tape recorder was interrupted momentarily. A push button activator at the theodolite interrupted wind speed information on the Ampex recorder and sounded a bell at the test control center. Photographs were taken when the aircraft was over the center of the microphone array, except during landings. In this case, photographs were taken when the aircraft reached the east end of the landing lane.

Calibration

At the beginning of each reel of 14-track tape, the 1000-Hz electrostatic actuator built into the 4921

microphone systems was used to set a known level on the tape. The electrostatic actuators were tested with B&K 4220, 124-dB pistonphones before and after the entire measurement program. (Calibration of the electrostatic actuator with the B&K 4220 allows one to establish an absolute K factor for each actuator.)

The instrumentation for the hover operation measurements was calibrated using B&K 4220 pistonphones. The calibration tone was recorded on the Nagra recorders.

3 DATA REDUCTION AND ANALYSIS

Raw Data

Each reel of tape from the 14-track Ampex PR-2200 tape recorder contained 12 channels of acoustical data; one channel of time code information; one channel onto which wind speed, wind direction, and signals from the cameras and theodolite were recorded; and one edge track onto which voice information was placed.

The 12 channels of acoustical data originated from the six microphones in the dynamic operations array. Each microphone signal was split: one part recorded linearly on one channel and the other sent through a 14 to 24 dB amplifier and recorded on another channel. The object was to increase the recorded dynamic range.

Time code information was supplied by a Systron Donner model 8350 time code generator. Day of the year, hours, minutes, and seconds were recorded on one channel of the Ampex recorder in digital format.

The remaining data channel contained the outputs of two voltage-controlled oscillators. These units were set up to form a discrete frequency band for each. The voltage-controlled oscillators were driven by an R. M. Young wind speed and direction measurement apparatus. Thus, this tape channel could be read by a spectrum analyzer, and wind speed and direction components determined. The edge track contained a vocal running diary of events.

Each helicopter run was photographed when the aircraft passed over the center of the landing lane. For 300-ft-AGL runs, two cameras, 90 degrees apart, focused on a point above the center of the runway where it was anticipated that the helicopter would fly. In the foreground of each photograph was a stator rod marked with uniform divisions. When the helicopter

passed over the appropriate spot, an operator triggered one of the cameras. A wire bus system triggered the other camera, and at the same time momentarily interrupted the wind direction signal, as described in Chapter 2. Each photograph carried information about latitude and side-to-side variation. The time at which the photographs were shot was noted on the analog recording.

In addition, a written record was kept by the theodolite operator. Since the theodolite was fixed in place for each run, the operator could record the relative altitude of the helicopter in the field of view when the cameras were fired (and a SonaAlert near the theodolite sounded). The theodolite was only used to check results from the cameras.

Reduction of Dynamic Operation Data

A Nova 1200 minicomputer sampled the spectrum analyzer every 0.5 sec, summed the spectra into one-third octaves, and stored the contents on disks. Since each microphone signal was split while recording (one high-gain and one low-gain channel), four passes were performed for each of the six microphones. (The spectrum analyzer requires a high- and low-frequency pass to properly constitute one-third octave bands over the total range.)

The procedure for the analysis system was as follows. When a helicopter was first detected, the tape and analysis equipment were started. The first two passes were made on the high-gain channel for high and low frequencies. Some overloading of the spectrum analyzer was expected, and these portions were flagged by the minicomputer. For record-keeping purposes, the minicomputer was used interactively; that is, information was requested from the operator before and after each pass.

After the helicopter being analyzed was no longer detectable, analysis stopped, the tape was rewound, and gain to the analyzer was lowered in preparation for a second set of passes. For these two low-gain passes, the analysis was started at the same time on tape by using the time code channel to insure synchronization between the passes. The two sets of passes were meshed by incorporating data from the second low-gain pass whenever the high-gain pass was overloaded. The results were fitted together to form the full spectrum per 0.5 sec for each microphone.

Reduction of data from the two cameras was handled differently. The graduated stator rod in the fore-

ground of each photograph allowed calculation of altitude and lateral variation over the center of the landing lane because the camera angle, distance to the stator rod, and distance between graduations on the stator rod were known. Corrections were made for aberrations in the lens.

Negatives of each helicopter were projected on the screen of a microfiche reader; measurements were taken in relation to the stator rod, and data were encoded into the minicomputer for further calculation and analysis. Given the information supplied by the two pictures, algorithms were written that located the helicopter in three dimensions at the time both cameras were fired. The slant distance to each of the six microphones in the array was calculated based on the position of the helicopter in space and its forward speed.

The problem of different types of noise being present is inherent in any analysis procedure. However, noise from different sources only becomes significant when it approaches the signal level. In this study, three methods were used to determine the combined noise level.

For the first reading—ambient noise—a recording was made immediately after the helicopter left the area following a set of passes. This reading reflected ambient sounds (such as wind, vehicles, birds, and other environmental sounds) that occurred during the tests.

Electrical noise—the noise of the system that is constant at different gain settings—was measured by attaching a dummy microphone to the input amplifier at one of the stations and measuring the resultant level on playback from tape.

The third noise reading—tape noise—was taken by shorting the input to one channel and recording. On playback, the level was measured.

These three readings were summed to calculate a composite noise level (CNL) by one-third octaves for each gain setting used. The correct CNL was compared to the resultant one-third octave spectra for each 0.5 sec, and those 0.5-sec intervals were flagged if their levels came within 3 dB of the CNL value. For all noise readings taken, gain settings throughout the system were held the same as they were when the helicopter data were recorded.

Data Analysis

In addition to the reduction of dynamic operation data into one-third octave spectra for each 0.5 sec of

recording, the SEL of each flyover was directly measured in the field using the CERL-developed True Integrating Noise Monitor and SEL Meter. The 0.5-sec spectra and the overall field-measured SEL were combined to produce A-weighted SEL versus distance relations.

These relations were developed in four steps. First, the A-weighted SEL for the microphone flyover was entered. Essentially, this calculation involved forming the integral of the A-weighted pressure squared received by the microphone. The CERL monitor performed this operation automatically. Second, the 0.5-sec time interval having the maximum A-weighted value was determined, and the entire one-third octave spectrum for that 0.5-sec interval was recorded. Third, from the positional information on the photographs, the closest approach of aircraft to microphone for each individual flyover recording at each microphone was determined and synchronized to the magnetic tape recording. Finally, the maximum spectrum and distance of closest approach were used to convert the raw field-measured SEL (A-weighted) to an equivalent SEL for a day with a standard temperature of 59°F and relative humidity of 70 percent.

During this final step, A-weighted SEL versus distance relations were established. The data used were the SEL at the microphone corrected to the standard day conditions, the distance of closest approach from aircraft to microphone, and the maximum one-third octave spectra during the 0.5 sec having the maximum A-weighted reading. Distance causes three factors to vary: air absorption (the one-third octave spectrum was used to determine the effect of air absorption), the $1/r^2$ amplitude change of a point acoustical source, and the apparent durational change of a source moving in a straight line at constant speed. Appendix A of CERL Technical Report N-38 contains a detailed description of this analysis procedure, which is structured similarly to the Air Force procedure that was written in part to describe the reduction of fixed-wing aircraft data.⁶ The primary difference between the Air Force and Army data reductions is that the Air Force used tone corrections and effective perceived noise level (EPNdB) as well as A-weighted levels. The Joint Services (in conjunction with DOD) subsequently agreed to eliminate EPNdB and replace it with A-weighted levels, and to

⁶D. E. Bishop and W. J. Galloway, *Community Noise Exposure Resulting From Aircraft Operations: Acquisition and Analysis of Aircraft Noise and Performance Data*, Report AMRL-TR-73-107 (Bolt, Beranek, and Newman, 1975).

eliminate the tone corrections. Additionally, it was found that the concept of tone correction did not apply to helicopters since the primary noise source over most of a flyby is the rotor rather than the engines.

Analysis of the hover data was quite simple. It should be recalled that a 30-sec recording was made at 45-degree increments around the hovering helicopter at a distance of 400 ft from the center of the aircraft. Analysis consisted of direct measurement of the equivalent A-weighted levels (L_{eq}) for each recording. This L_{eq} measurement was performed using the CERL True Integrating Noise Monitor and SEL Meter (which employs a true integrating detector).

4 RESULTS AND DISCUSSION

This chapter explains the results of the operational measurements performed at Fort Campbell on the UH-60A, CH-47C, and UH-1H. SEL versus distance data are discussed, variations in SEL with aircraft speed are examined, and Fort Campbell data are compared with the earlier results at Fort Rucker.

In analyzing the data, it was found that for dynamic operations microphone 5 consistently measured higher than the other five primary microphones. This systematic bias was about 5 dB or more. After intensive investigation, equipment malfunction or data analysis errors were eliminated as possible sources for the systematic variation.

Site-specific terrain features offered a potential explanation for the higher measurements at this position. Microphone 5 was placed near the bottom of a wash (drainage depression) and thus may have experienced effects of sound focusing. In other words, microphone 5 may have been near the center of a ground surface having a somewhat parabolic shape. If so, when a helicopter flew over, the ground surface would have acted as a reflector focusing the helicopter sound near the microphone.

However, the hover data, which include microphone 5, do not show the microphone to be any louder. This may have resulted from the height of the aircraft. If the terrain did reflect noise, the source had to be high enough to radiate into the reflector, which should have focused less on landings than on level flyovers. Examination of the data reveals exactly this trend. Microphone 5 was high by 5 dB or more on level flyovers

(when the aircraft was 300 to 1000 ft AGL), and by about 3 dB on landings (when it was perhaps 50 to 100 ft AGL). On hovers, microphone 5 was not higher than the others.

The data show that the helicopter is a very directional source which can be loosely thought of as a dipole with respect to sideline microphones. The spacing of the dipole appears to be approximately the rotor diameter. Figures 6 and 7 illustrate the directivity effects of an ideal dipole for level flyovers at 300 ft AGL and 1000 ft AGL. The reader must note that Figures 6 and 7 apply only when the aircraft is at the point of closest approach to the microphone. The radiation directivity pattern of the helicopter in three dimensions can be more nearly thought of as a portion of a donut (radiation is also reduced from the trailing portion of the donut).

Because of this directivity, a helicopter passing directly overhead sounds the loudest when it forms an angle of perhaps 45 degrees between the observer and the helicopter, and has not yet reached the observer. By the time the helicopter passes over and is leaving the area, it is already much quieter because of the directivity effects. Similar helicopter forward motion effects are observed at the sideline microphones, but these are also very sensitive to helicopter altitude, as is shown in Figures 6 and 7.

The data indicate that the complicated partial donut directivity pattern of the helicopter produces the following effects. The microphones directly underneath the aircraft (microphones 1 and 4) consistently measure lower levels than the sideline microphones. At 300 ft AGL, the 200-ft sideline microphones measure higher levels than do the 400-ft sideline microphones. However, because of the directivity pattern (Figure 7) when the aircraft is at 1000 ft AGL, the 400-ft sideline microphones measure as great or greater levels than do the 200-ft microphones underneath the aircraft.

To develop average sound exposure level versus distance or speed relations, the data for microphone 5 were eliminated because they were consistently high. In addition, the data from the other five microphones were not simply averaged. More complicated calculations were done because microphones 1 and 4 could systematically bias the data by 0.1 or 0.2 dB. Since these microphones always measured lower than the sideline microphones because of the directivity of the source, the data were combined by applying a 4/3 multiplier to

the data for microphones 2, 3, and 6, and a multiplier of 1 to the data for microphones 1 and 4.

Sound Exposure Level Versus Distance

Figure 8 illustrates the developed SEL versus distance for level flyovers at a speed of 100 knots (300 ft AGL) for the UH-50A. Figure 8 also contains the SEL versus distance curve developed for the UH-60A landings. (For the heavily loaded "landing," the UH-60A actually brought the sling-loaded water buffalo in to the landing point and hovered with the buffalo resting on the ground.) As with the 1974 Fort Rucker data, the heavily loaded aircraft is about 2 dB louder than the lightly loaded aircraft, and the landing creates substantially more noise than a level flyover.

Figure 9 illustrates the SEL versus distance data developed for the CH-47C for level flyovers at a speed of 100 knots. Two curves are for data gathered at 300 ft and 1000 ft AGL; the third is for data on CH-47C landing noise, which is substantially greater than for level flyover.

Hover Data

Table 4 lists the in- and out-of-ground effect hover data (L_{eq}) taken at the eight measurement positions for the various aircraft. Raw data are in Appendix B.

CERL Technical Report N-38 included generalized hover contours and a table of parameters to be used for individual aircraft. The data gathered at Fort Campbell have been combined with the original data from Fort Rucker to form a revised set of generalized hover contours and individual aircraft parameters. Table 5 lists the amounts by which these generalized hover contours depart from a purely omnidirectional source. Table 6 contains the energy average hover emission value produced by each aircraft, if treated as an omnidirectional source. Together, these tables yield a generalized hover emissions pattern scaled to each aircraft. To form these composites, the 400-ft data for Fort Campbell were converted to 200 ft for the UH-60A and UH-1H, and to 300 ft for the CH-47C using a factor of 7 dB attenuation for doubling of distance. (The discrepancy between the measured UH-1H data at Forts Campbell and Rucker is discussed on p. 15.)

Variation of Sound Exposure Level With Speed

Figure 10 illustrates the measured variation of SEL with speed for the CH-47C at a slant distance of 500 ft. The data are shown separately for the 300-ft and 1000-ft-AGL flyovers. Figure 11 presents the same type

of data for the UH-1H. Figure 12 illustrates the variation of sound exposure level with speed for the UH-60A—again at a slant distance of 500 ft. In this case, the data are presented for heavily and lightly loaded aircraft rather than for 300-ft- and 1000-ft-AGL flyovers. The data in Figures 10 through 12 are largely independent of aircraft altitude, slant distance, or load. Thus, composite curves can be constructed. Figure 13 illustrates the composite variation of SEL with distance for the three aircraft studied. Figure 13 is a generalized curve normalized to 0 dB at a speed of 100 knots.

Direct measurement of SEL versus aircraft speed is one way to determine the speed relation. Another approach is to measure the variation of the ½-sec maximum L_{eq} with speed. The variation should be equal to that of the ½-sec maximum minus 10 log (aircraft speed). Figures 14, 15, and 16 present data for the ½-sec maximum L_{eq} of the aircraft operations and slant distances shown in Figures 10, 11, and 12. Again, the data and curves are largely independent of aircraft height or load. Figure 17 illustrates the composite curves for the three aircraft; these curves were developed using maximum L_{eq} plus the theoretical variation of flyover duration with speed.

To compare the variation with speed of SEL and maximum ½-sec L_{eq} , the quantity 10 log (velocity/100) was added to the curves of Figures 12, 14, and 15 to form Figures 18, 19, 20, and 21. The data in Figure 21 were then compared with those in Figure 17 by plotting the difference (Figure 22). Table 7 lists the data in Figures 17, 21, and 22. The differences are small, showing that the variation of SEL with speed can be approximated by the variation of L_{eq} with speed minus 10 log (velocity) plus a constant. The tables in Appendix C list the data from Figures 8 through 22.

Comparison of Fort Campbell and Fort Rucker Results for the UH-1H Aircraft

Figure 23 presents the SEL versus distance curve developed for level flyovers (lightly loaded) at 80 knots and 300 ft AGL. The values at Fort Campbell are 3 to 4 dB lower than those at Fort Rucker. Figure 24 provides a similar comparison for landings. Again the values are 3 to 4 dB lower at Fort Campbell than at Fort Rucker. Table 8 presents the maximum ½-sec L_{eq} for several microphones at Forts Rucker and Campbell. These differ by 4 dB or more. The table also compares the 200-ft corrected average (energy) hover L_{eq} for in-ground and out-of-ground effects at the two forts. Table 8 also shows that the L_{eq} values for the in-ground effect hover are about 3 to 4 dB lower at Fort Campbell

than at Fort Rucker. However, the L_{eq} values for the out-of-ground effect hover are similar.

The UH-1H aircraft measured at Forts Rucker and Campbell are essentially the same. There have been no modifications to blades, transmissions, or engines. The only known change is the installation of dynamic blade balancing hardware during 1974. For level flyovers, a dynamically balanced UH-1H aircraft exhibits blade slap in the speed range of 65 to 80 knots. Without dynamic balancing, this range may be slightly wider because the region of tip/wake vortex interaction increases. Thus, the 80-knot data from Fort Rucker could well be 3 to 4 dB louder than the same measurements at Fort Campbell. A similar effect may occur for landings.

Why are the out-of-ground effect data similar while Fort Rucker's in-ground effect data are higher than Fort Campbell's? Here, blade/vortex interaction is not a factor. However, the answer may lie in the measurement surface. The hover area used at Fort Rucker was the installation's helicopter parking, and hence was almost entirely paved; the area at Fort Campbell was grass. Theoretical computer analysis⁷ shows the hard surface increases measured in-ground effect readings (at 200 ft) by about 4 dB, but only increases out-of-ground effect readings by about 1½ dB. Thus, the measurement surface may contribute to the differences in hover levels.

Other reasons for the difference in levels might include changes in flight procedures, environmental factors affecting the measurement, or errors in measurement. At both installations, Army pilots flew the same type of aircraft 300 ft AGL at a speed of 80 knots, maintaining constant altitude. In both cases, the pilots performed in-ground and out-of-ground effect hovers. In both cases, measurements were made during warm weather, and the flyovers were performed in a grass-covered area with some trees nearby. (However, at Fort Campbell, the forests surrounding the clear area were much thicker than at Fort Rucker.) In both cases, independently operated and calibrated measurement systems were used. The two systems at Fort Rucker produced internally consistent measurements, as did the two at Fort Campbell. While environmental factors may have affected the total integrated exposure level,

⁷This analysis is based on R. J. Donato, "Propagation of a Spherical Wave Near a Plane Boundary With a Complex Impedance," *Journal of the Acoustical Society of America*, Vol 60, No. 1 (July 1976), pp 34-39.

It seems unlikely that they could have affected the maximum 1/8-sec L_{eq} , or the hover data measured at distances of 200 to 400 ft. Also, the two independent measurement systems used at each installation tend to rule out the possibility of measurement error. Thus, the only known plausible explanations for the large variations recorded are the dynamic blade-balancing procedure and the "hard" hover surface area at Fort Rucker.

5 CONCLUSIONS AND RECOMMENDATIONS

SEL versus distance curves for the UH-60A and CH-47C were developed. For the UH-60A, the data show that a heavily loaded aircraft is about 2 dB louder than a lightly loaded one. Landing noise with the UH-60A and CH-47C is substantially greater than for level flyover.

The variation of SEL with speed is rather modest, except for aircraft at very low or very high speeds. The

variation of SEL with speed data will be incorporated in CERL's INCS system and, thus, will be available when (1) aircraft speeds differ significantly from the typical speeds, (2) the situation warrants this precision, and (3) the aircraft operational data are accurate enough to reliably indicate aircraft position, altitude, and speed as a function of time.

The measurements at Fort Rucker showed great internal consistency. Four aircraft of the same type measured during the same testing period at the same site and with the same equipment yielded similar results. The measurements at Fort Campbell also showed great internal consistency—except for microphone 5. However, the bias of microphone 5, and the discrepancy between the data gathered at Forts Campbell and Rucker, indicate problems that will have to be solved before the gathering of helicopter noise emissions data can be standardized. Better methods need to be developed to control site terrain and environmental factors, and to account for the effects of variations in maintenance procedures and pilot techniques. To begin understanding such discrepancies, it will be useful to replicate the measurements from Forts Campbell and Rucker with the UH-1H aircraft.

Table 1
Dynamic Operations Performed at Fort Rucker

Operation	Beginning Ground Track (GT) (degrees)
1. Level	360
2. Level	180
3. NOE*	360
4. NOE	180
5. Ascent	360
6. Descent	180
7. Descent	360
8. Ascent	180
9. Left turn	315
10. Right turn	45
11. Right turn	225
12. Left turn	135
13. Landing	180
14. Takeoff	180

*Nap of the earth (NOE) operations were not used in the analysis because of the inability to predict aircraft position.

Table 2
Helicopter Types and Loading Conditions
Measured at Fort Rucker

Helicopter Model	Loading Condition
OH-58	Normal
AH-1G	Normal
UH-1M	Normal
UH-1H	Maximum or Normal
UH-1B	Maximum or Normal
CH-47B	Maximum or Normal
CH-54	Maximum or Normal
TH-55	Normal

Table 3
Dynamic Operations Performed at Fort Campbell
by CH-47C and UH-1H

	Operation*	Altitude (ft)	Speed (knots)	GT (degrees)
1	LF	300	80	280
2	LF	300	80	100
3	LF	300	40	280
4	LF	300	40	100
5	LF	300	100	280
6	LF	300	100	100
7	LF	300	60	280
8	LF	300	60	100
9	LF	300	120	280
10	LF	300	120	100
11	LF	300	80	280
12	LF	300	80	100
13	LF	300	100	280
14	LF	300	100	100
15	Landing	-	-	280
16	IGE Hover			
17	OGE Hover			
18	Takeoff	-	-	280
19	LF	1000	80	100
20	LF	1000	80	280
21	LF	1000	100	100
22	LF	1000	100	280
23	LF	1000	120	100
24	LF	1000	120	280
25	LF	1000	60	100
26	LF	1000	60	280
27	LF	1000	100	100
28	LF	1000	100	280
29	LF	1000	80	100
30	LF	1000	80	280

*LF = level flyover; IGE = in-ground effect; OGE = out-of-ground effect.

Table 4
Average (Energy) Measured Data (dB)

Aircraft	Hover	Position (degrees)*								Average
		0	45	90	135	180	225	270	315	
UH-1H (Unloaded)**	IGE	74.1	80.6	75.8	75.1	75.5	75.3	77.9	74.2	76.7
	OGE	78.8	81.5	84.4	86.0	85.0	85.5	80.5	78.7	83.4
UH-60-A (Unloaded)**	IGE	77.1	75.5	76.9	76.3	77.2	78.0	74.8	77.5	76.8
	OGE	80.4	79.5	86.4	81.6	83.4	81.4	81.9	79.9	81.9
UH-60-A (Loaded)**	OGE	81.0	80.6	86.1	88.2	85.5	82.0	78.0	81.6	84.0
CH-47C (Unloaded)†	IGE	84.3	86.5	86.9	83.2	80.3	75.8	75.5	80.7	83.3
	OGE	84.7	88.1	88.3	87.3	81.9	81.6	82.2	84.9	85.6

*Front of aircraft is 0°.

**From Table B5.

†From Table B8.

Table 5
Hover Directivity Versus Position (dB)
(0° Is Front of Aircraft)

Position	Single Rotor (Overall Average, Table B7)	Dual Rotor (Overall Average, Table B10)
0	-2.7	+0.2
45	-1.6	+2.8
90	-0.6	+2.5
135	+1.4	0
180	+1.1	-2.1
225	+2.2	-3.0
270	-0.4	-3.3
350	-2.4	-1.1

Table 6
Energy Average A-Weighted Hover Sound Levels (dB)
(To Be Used With Table 5)

Aircraft	Surface	Distance (feet)	IGE	OGE
AH-1G	Hard	200	88.3	87.8
OH-58	Hard	200	81.4	83.7
UH-1B*	Hard	200	85.9	90.1
UH-1H*	Hard	200	88.4	91.8
UH-1H**	Soft	400	76.7	83.4
UH-1M	Hard	200	86.2	89.9
UH-60A*	Soft	400	81.7	83.1
CH-47A/B*	Hard	300	90.2	91.8
CH-47C**	Soft	400	83.3	85.6
TH-55	Hard	200	84.8	

*Dual load.

**Light load.

Table 7
Difference, in Decibels, Between Composite Speed Variation Functions
(L_{eq} vs Speed as Compared to the Function $SEL + 10 \log [v/100]$ vs Speed)*

Speed (knots)	Figure 17 Composite, L_{eq} vs Speed**			Figure 21 Composite, $SEL + 10 \log (v/100 \text{ knots})$ vs Speed***			Difference, Figure 22†		
	CH-47C	UH-1H	UH-60A	CH-47C	UH-1H	UH-60A	CH-47C	UH-1H	UH-60A
40	3.6	0.4	-4.3	3.7	-3.7	-4.7	0.0	4.1	0.4
60	2.2	-4.0	-2.6	2.8	-4.0	-2.8	-0.6	0.0	0.2
80	0.9	-2.3	-1.6	0.7	-2.3	-1.5	0.2	0.0	-0.1
100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120	0.2	4.9	2.1	1.3	6.1	2.3	-1.1	-1.2	-0.2
140	1.8		3.7	3.9		4.0	-2.1		-0.3

*Data for 300-ft and 1000-ft AGL are combined.

**From Table C3.


***From Table C4.

†From Table C5.

Table 8
Comparison of Fort Campbell and Fort Rucker UH-1H Data

	Fort Rucker	Fort Campbell	Difference
IGE hover--200 ft (Fort Campbell corrected +7 dB for distance and +2 dB for light load)	88.4	85.7	+2.7
OGE hover--200 ft (Fort Campbell corrected +6 dB for distance and +2 dB for light load)	91.8	91.4	+0.4
Max. 1/2-sec Leq			
Mikes 1&4*	91.7	85.2	+6.5
Mikes 2&5	88.2	84.0	+4.2
Mike 3	84.9	80.7	+4.2

*The 6 dB difference (high reading at Fort Rucker) may be caused by the very loud noise during the few seconds just before the aircraft went overhead. This may result from retreating blade/vortex interaction. Since it was a short-lived effect, it does not influence the SEL greatly.

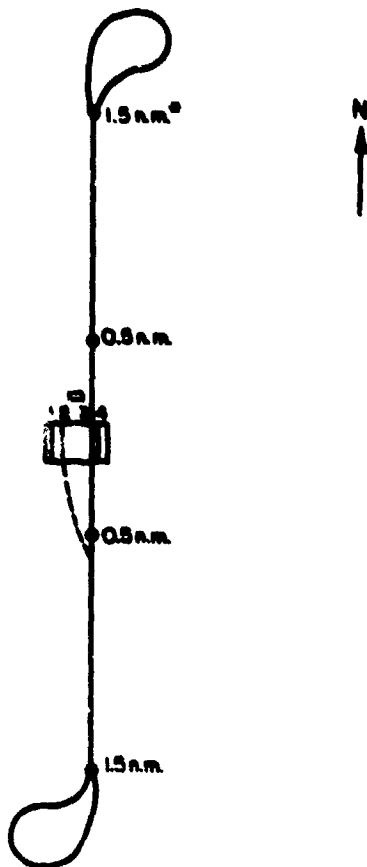

* NAUTICAL MILES

Figure 1. Flight path for level flyovers.

GROUND TRACK = 280 DEGREES

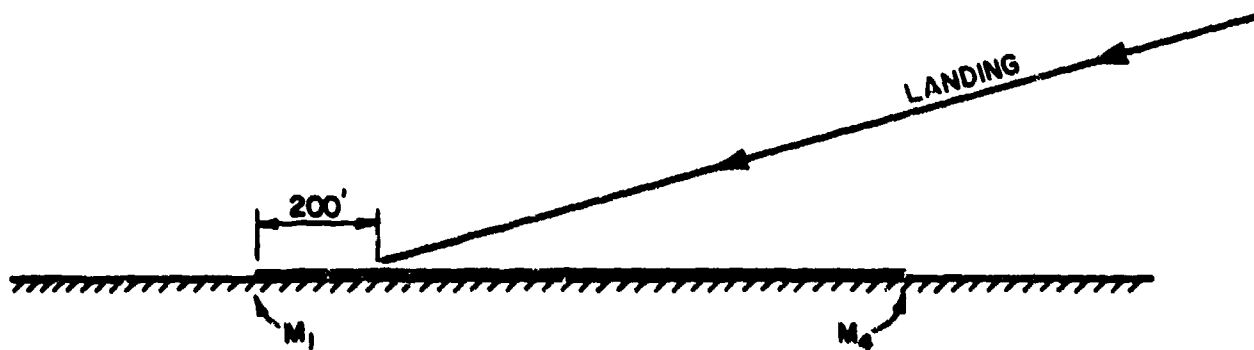


Figure 2. Flight path for landing.

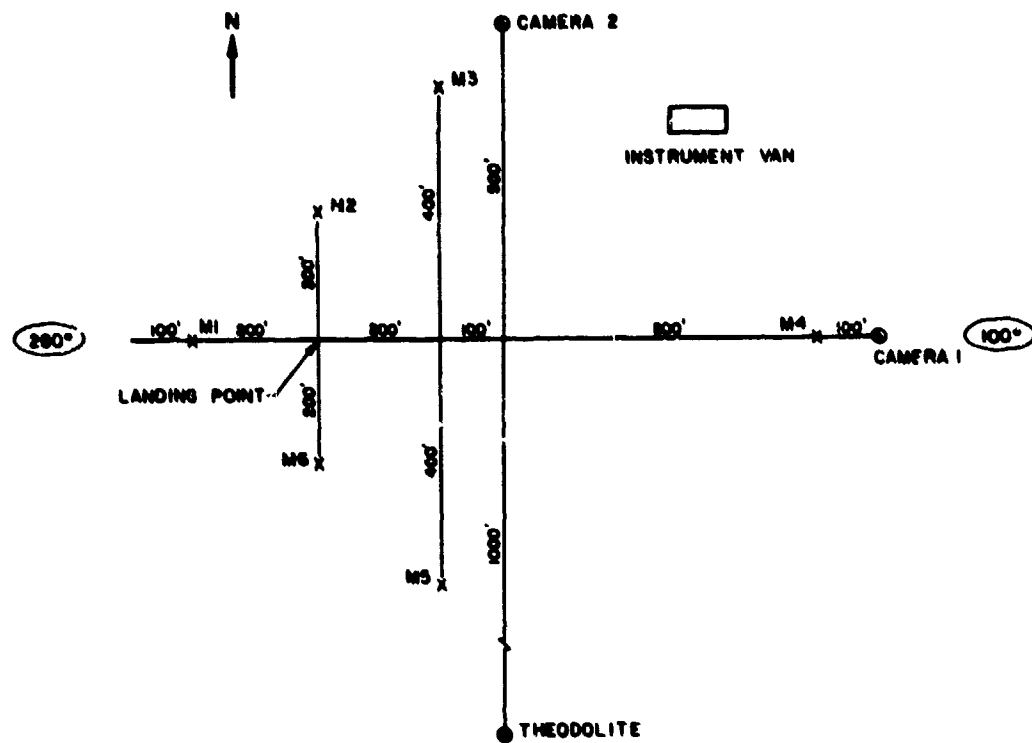


Figure 3. Microphone/camera layout at Fort Campbell.

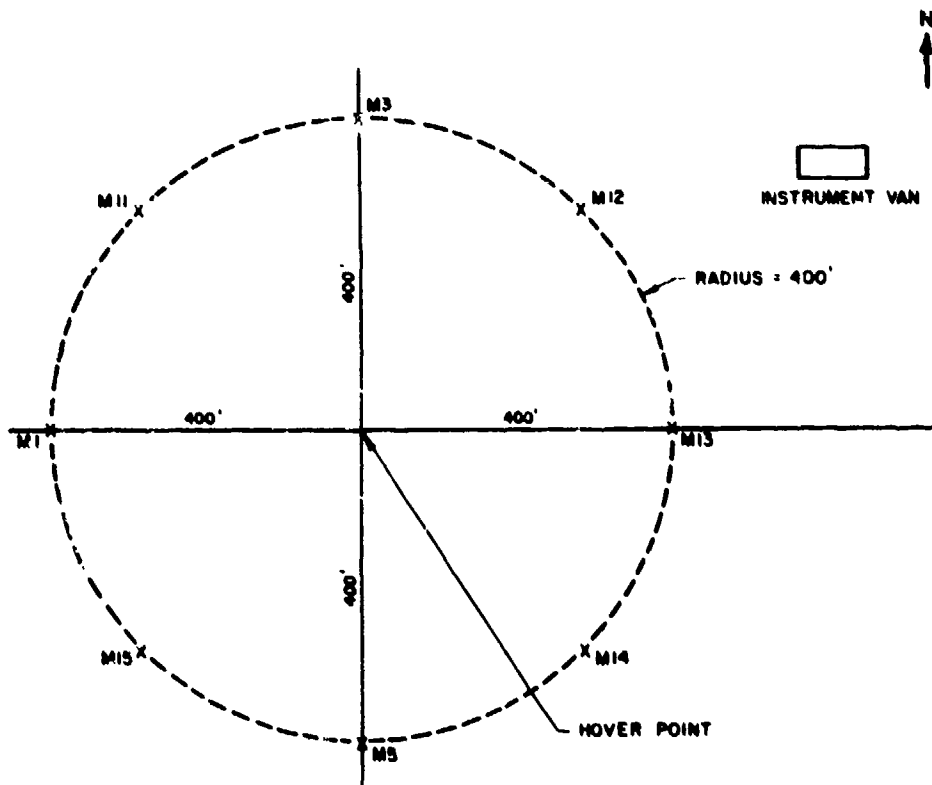


Figure 4. Hover microphones at Fort Campbell.



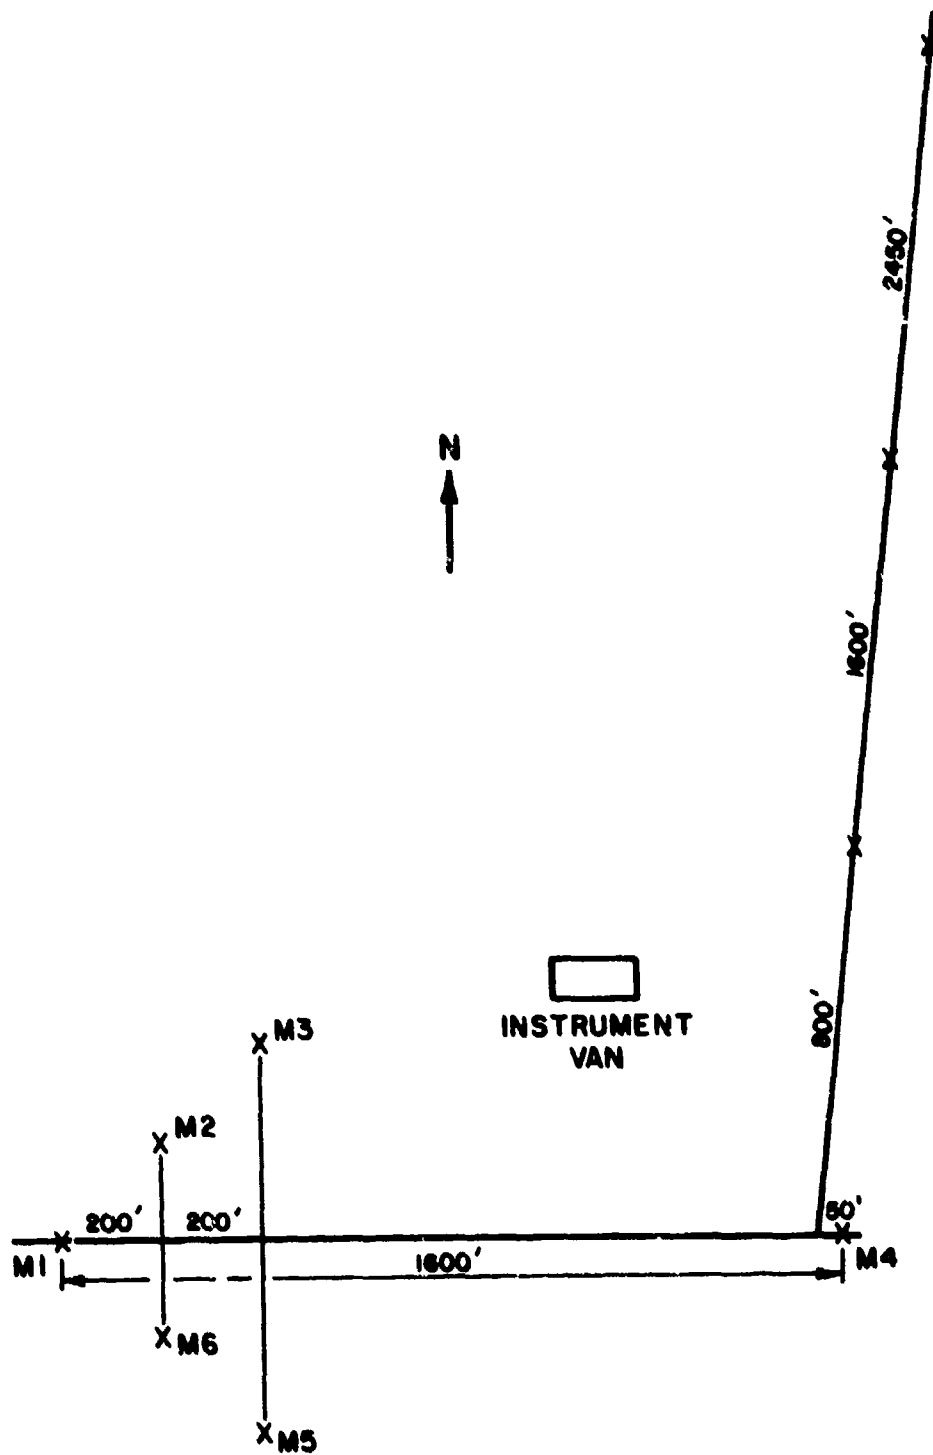


Figure 5. Sideline microphones at Fort Campbell.

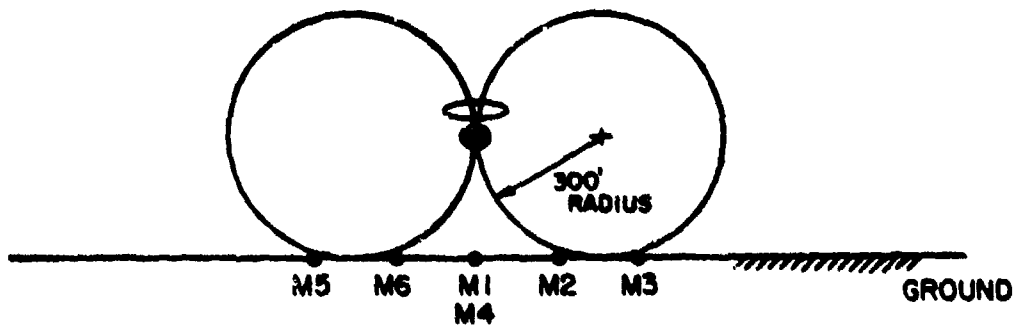

ALTITUDE IS 300' AFL - M1 AND M4 ARE IN A SHADOW,
M2, M3, M5 AND M6 ARE AT EQUAL POINTS ON THE
PATTERN.

Figure 6. Directivity effects-- 300 ft AGL.

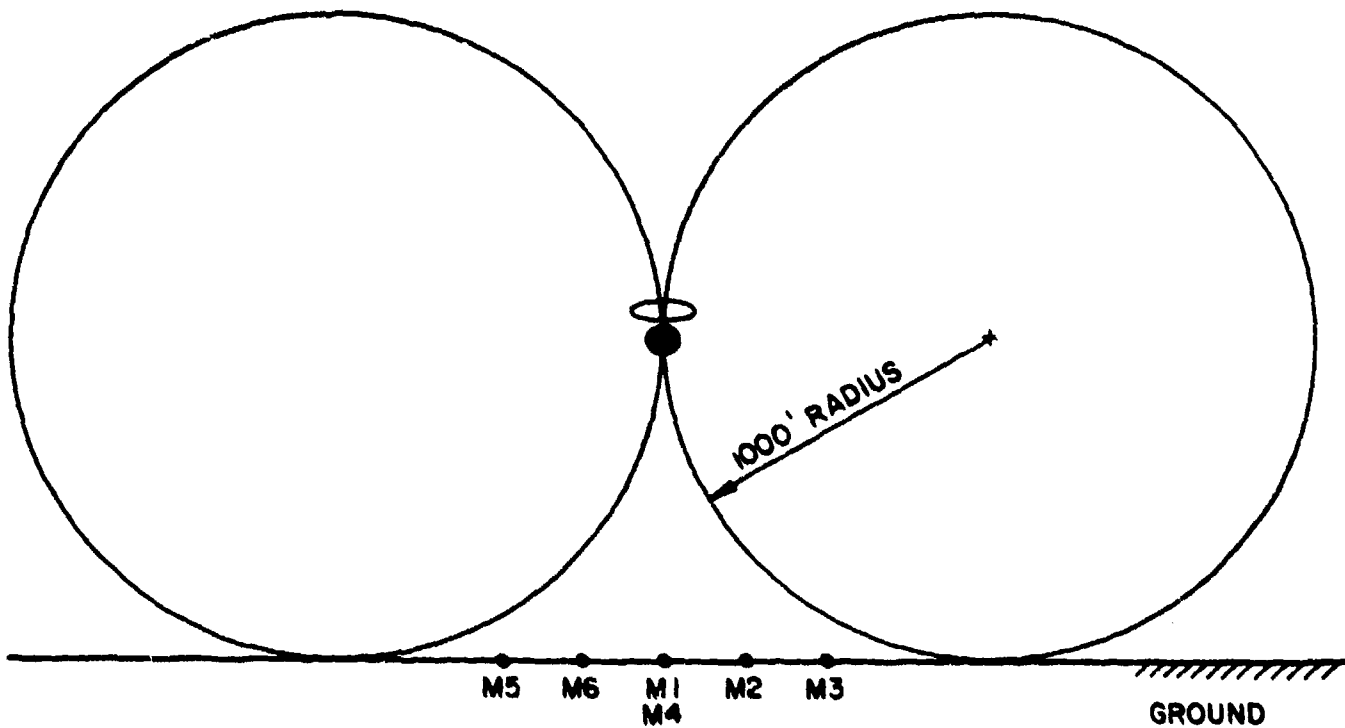

ALTITUDE IS 1000' AFL - M1 AND M4 ARE IN A SHADOW.
M3 AND M5 ARE CLOSER TO THE PATTERN THAN
ARE M2 AND M6.

Figure 7. Directivity effects-- 1000 ft AGL.

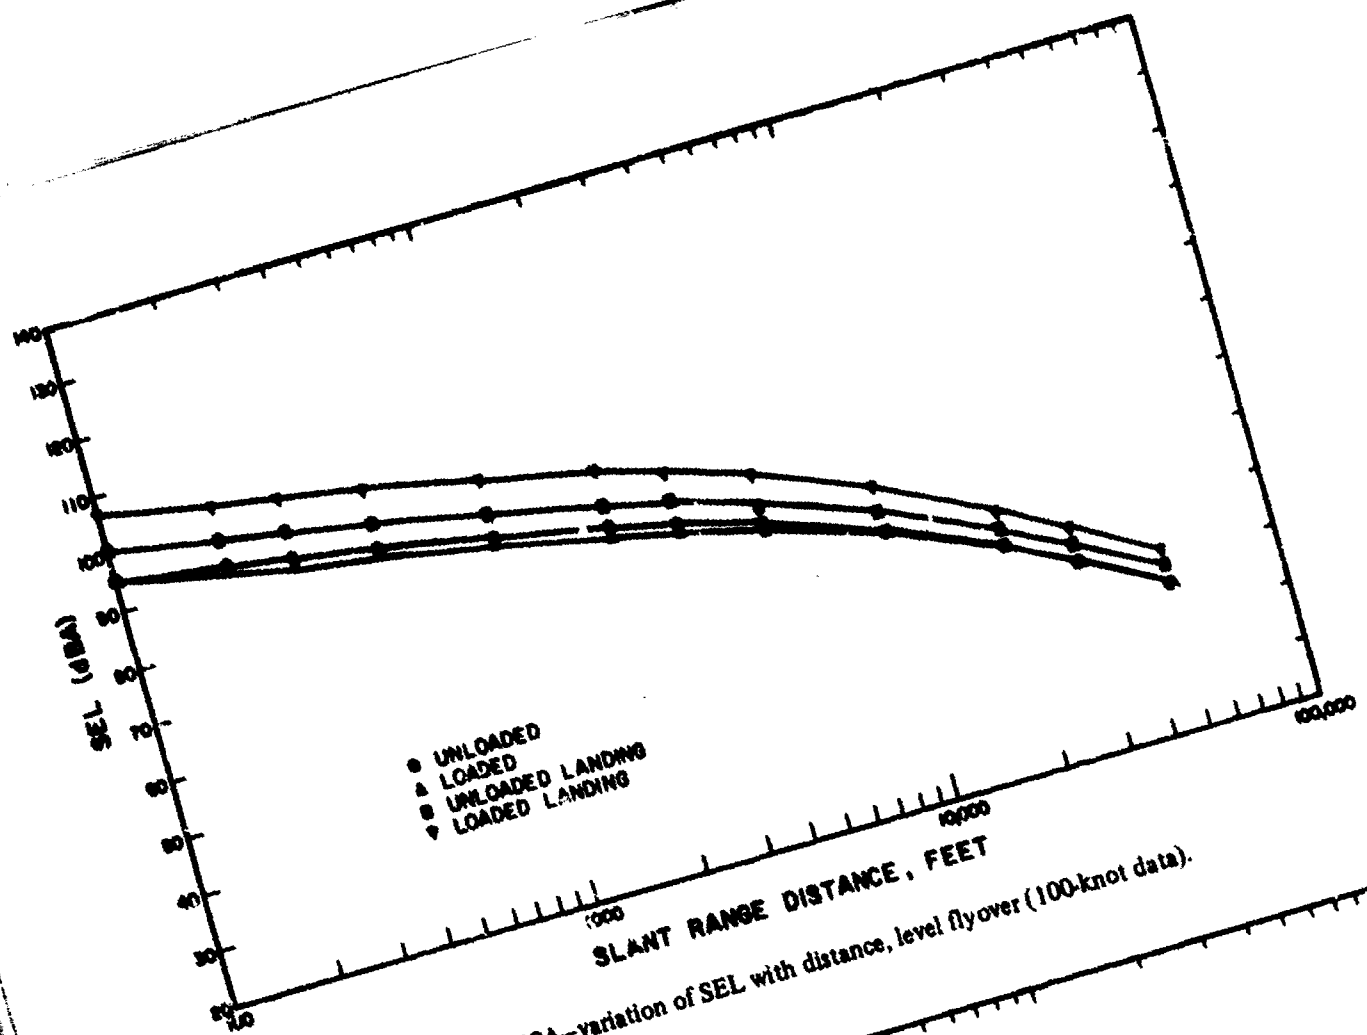


Figure 8. UH-60A—variation of SEL with distance, level flyover (100-knot data).

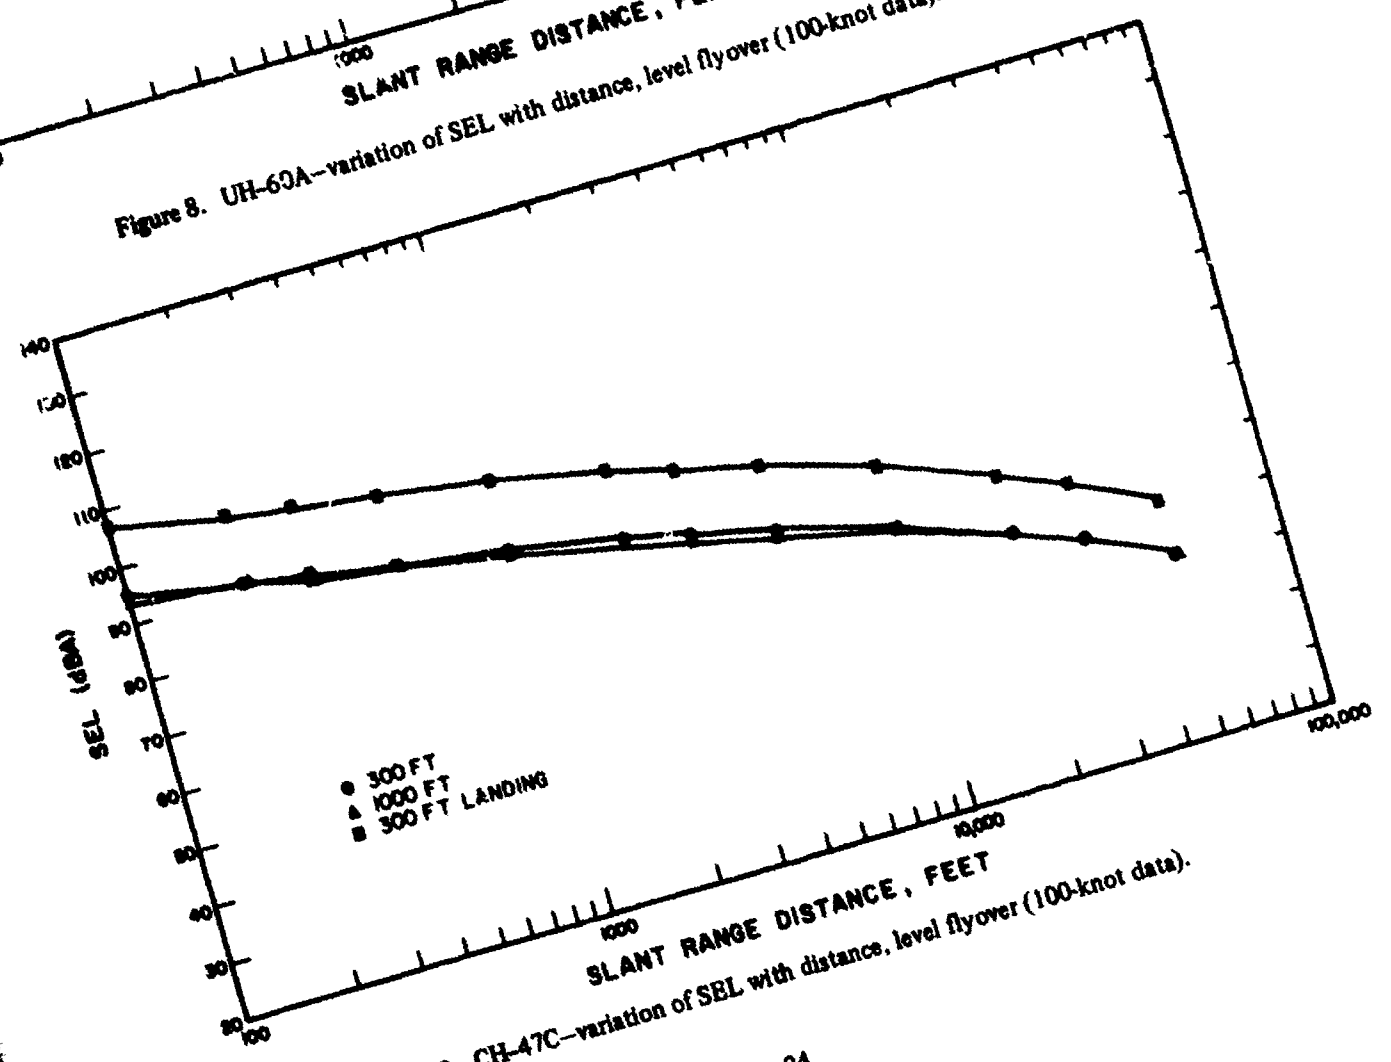


Figure 9. CH-47C—variation of SEL with distance, level flyover (100-knot data).

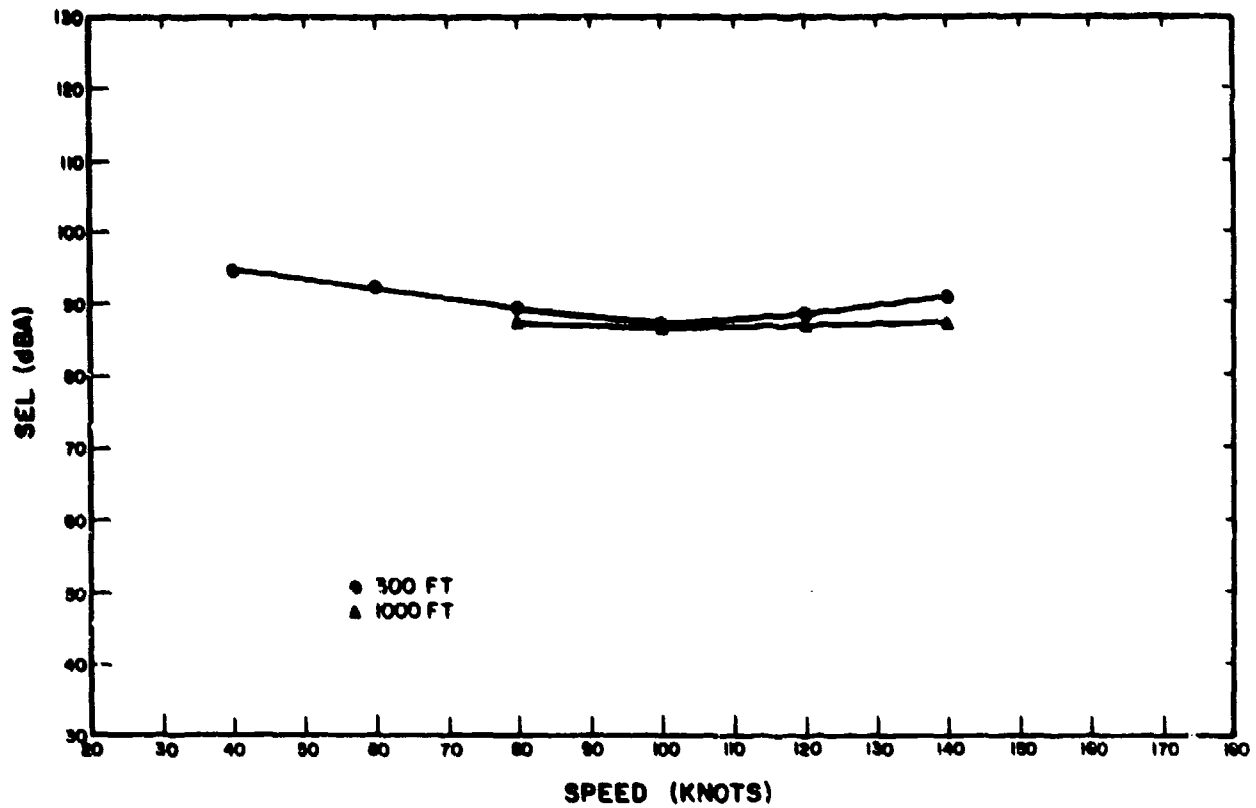


Figure 10. CH-47C—variation of SEL with speed at 500 ft (300- and 1000-ft flyovers).

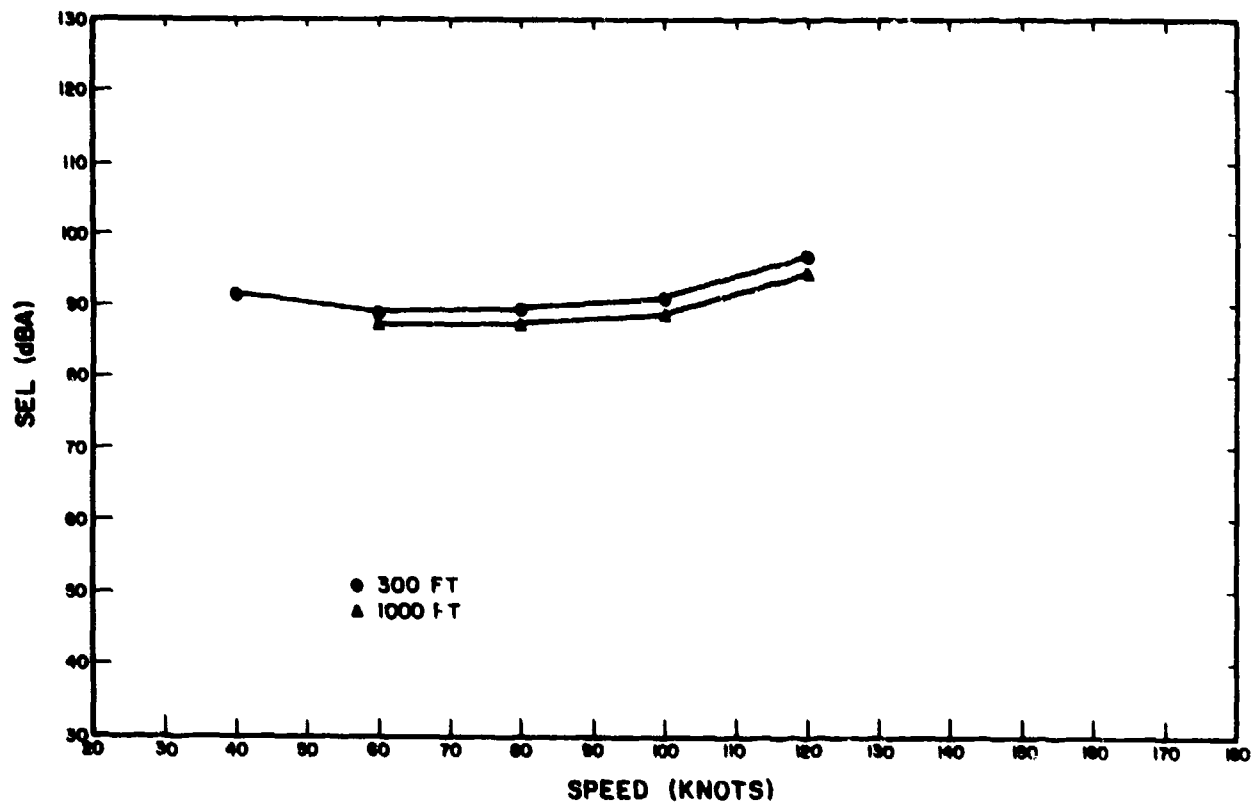


Figure 11. UH-1H—variation of SEL with speed at 500 ft (300- and 1000-ft flyovers).

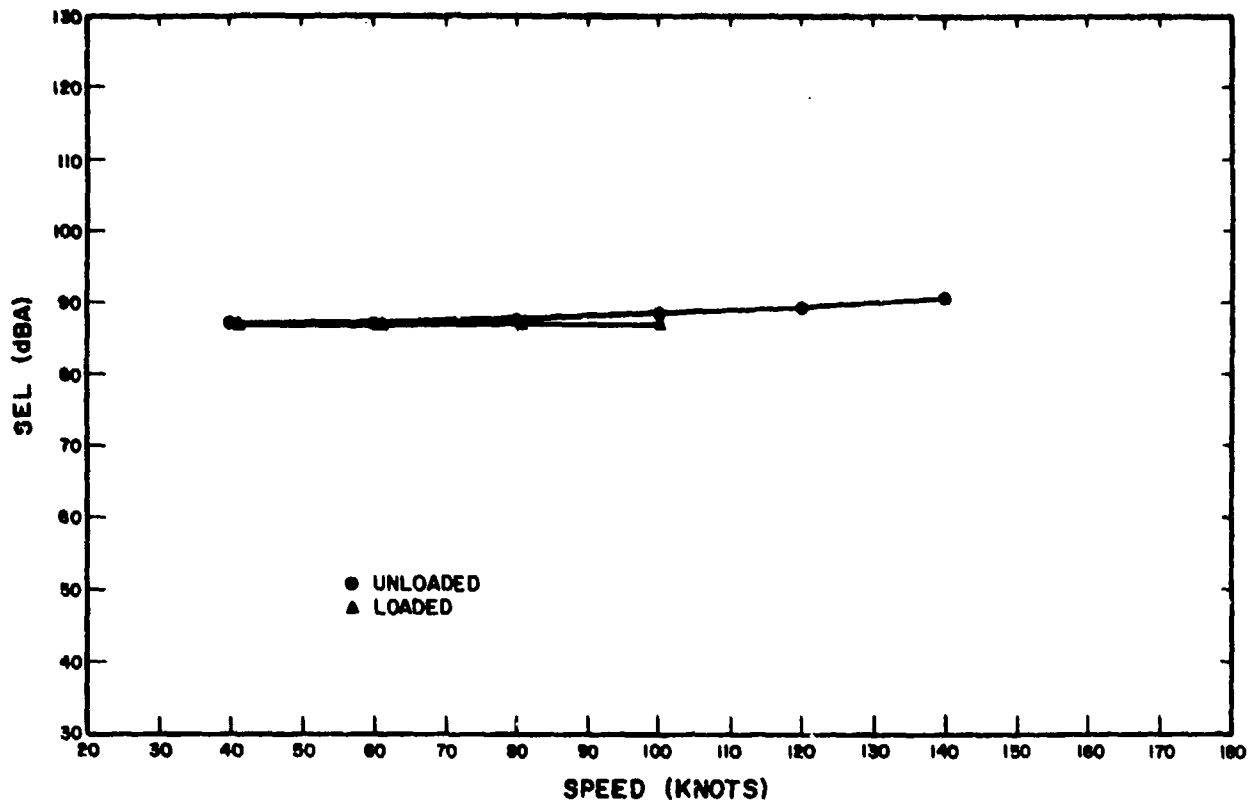


Figure 12. UH-60A—variation of SEL with speed at 500 ft (loaded and unloaded flyovers).

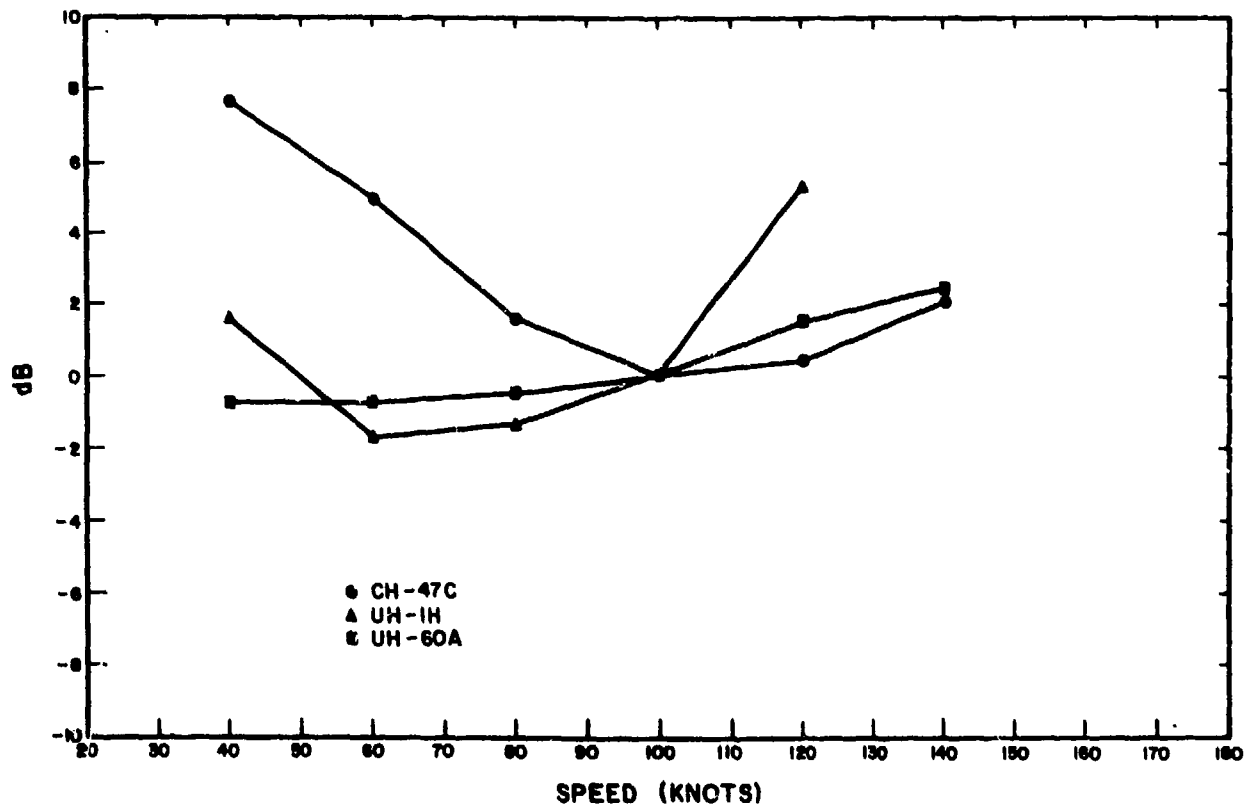


Figure 13. Composite curves of variation of SEL with distance at 500 ft (normalized to 0 dB at 100 knots).

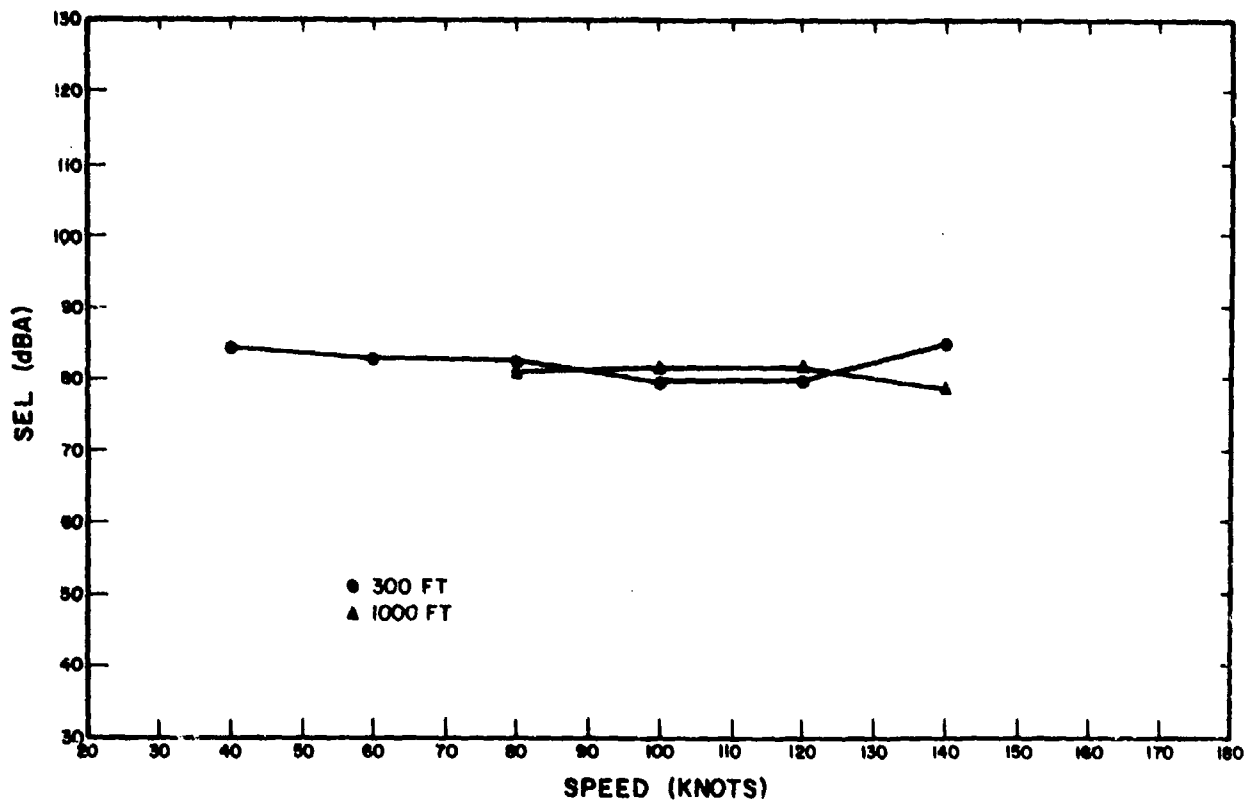


Figure 14. CH-47C—variation of L_{eq} with speed at 500 ft (300- and 1000-ft flyovers).

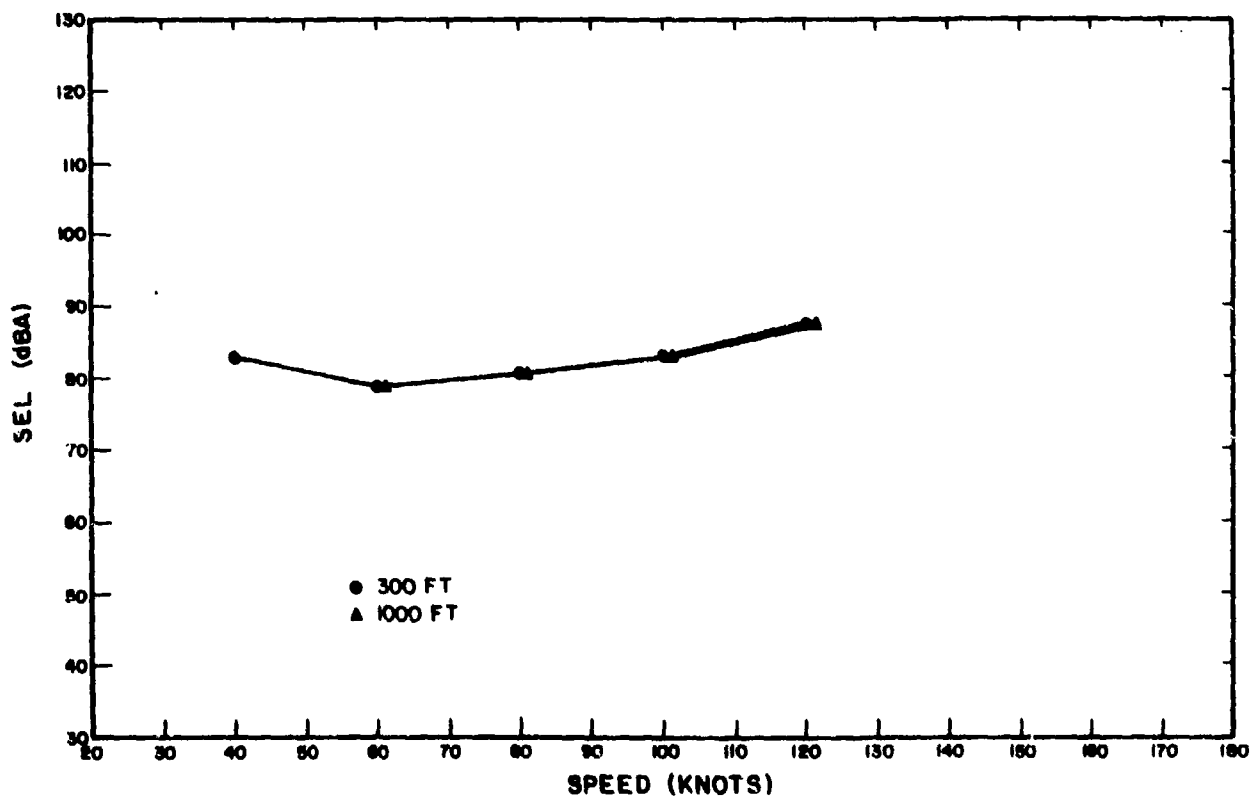


Figure 15. UH-1H—variation of L_{eq} with speed at 500 ft (300- and 1000-ft flyovers).

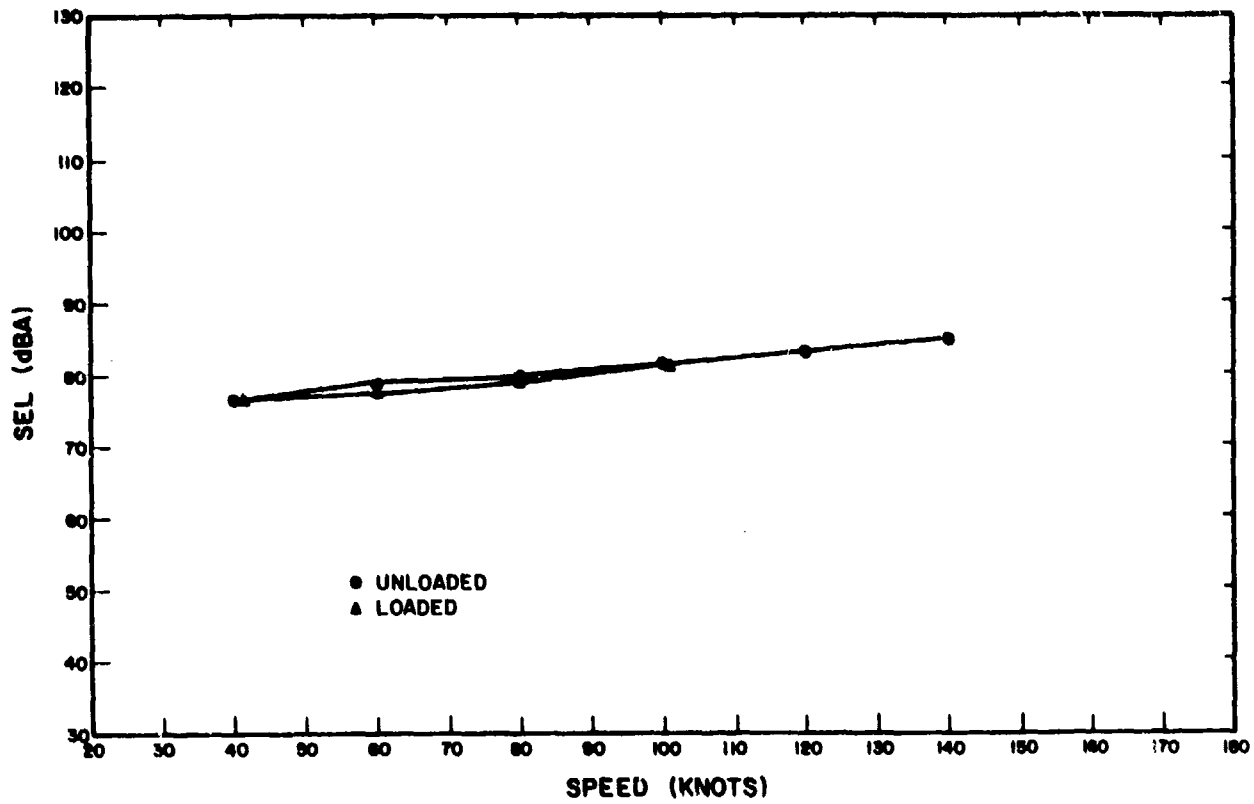


Figure 16. UH-60A—variation of L_{eq} with speed at 500 ft (loaded and unloaded flyovers).

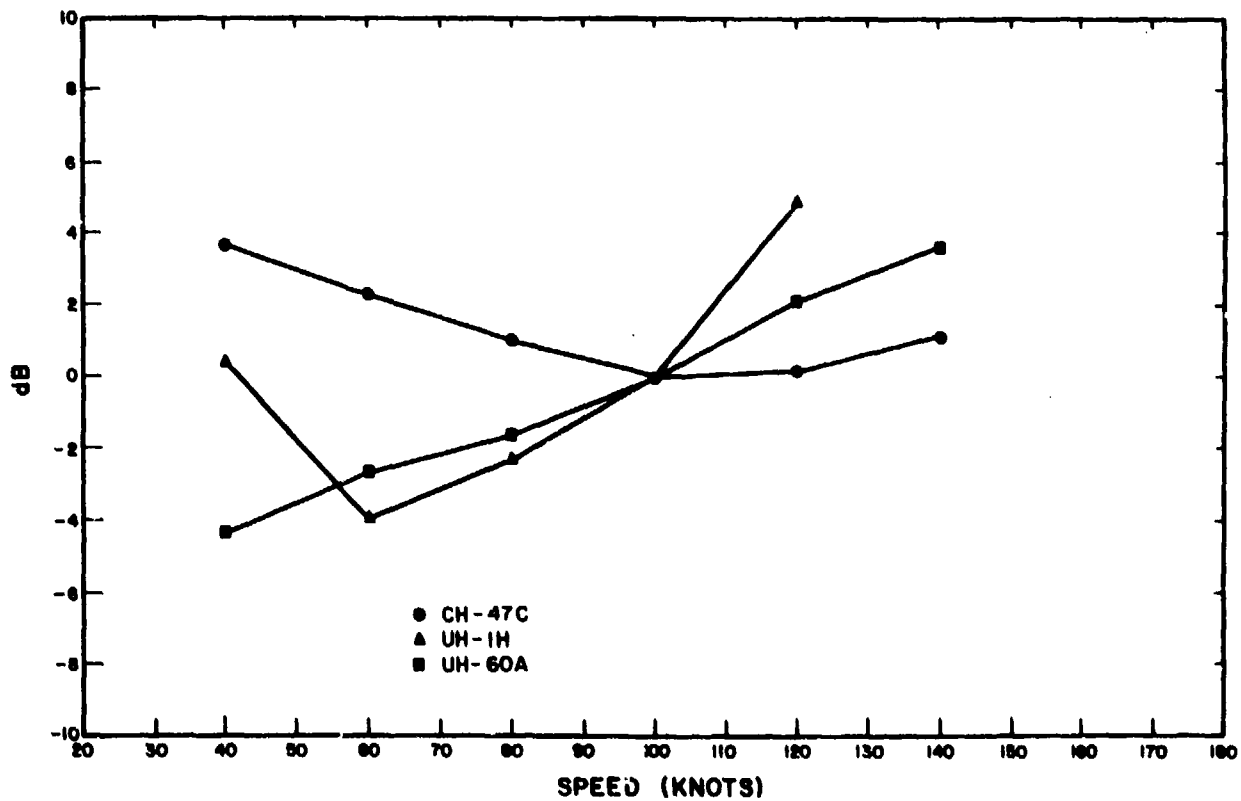


Figure 17. Composite curves of variation of L_{eq} with speed at 500 ft (normalized to 0 dB at 100 knots).

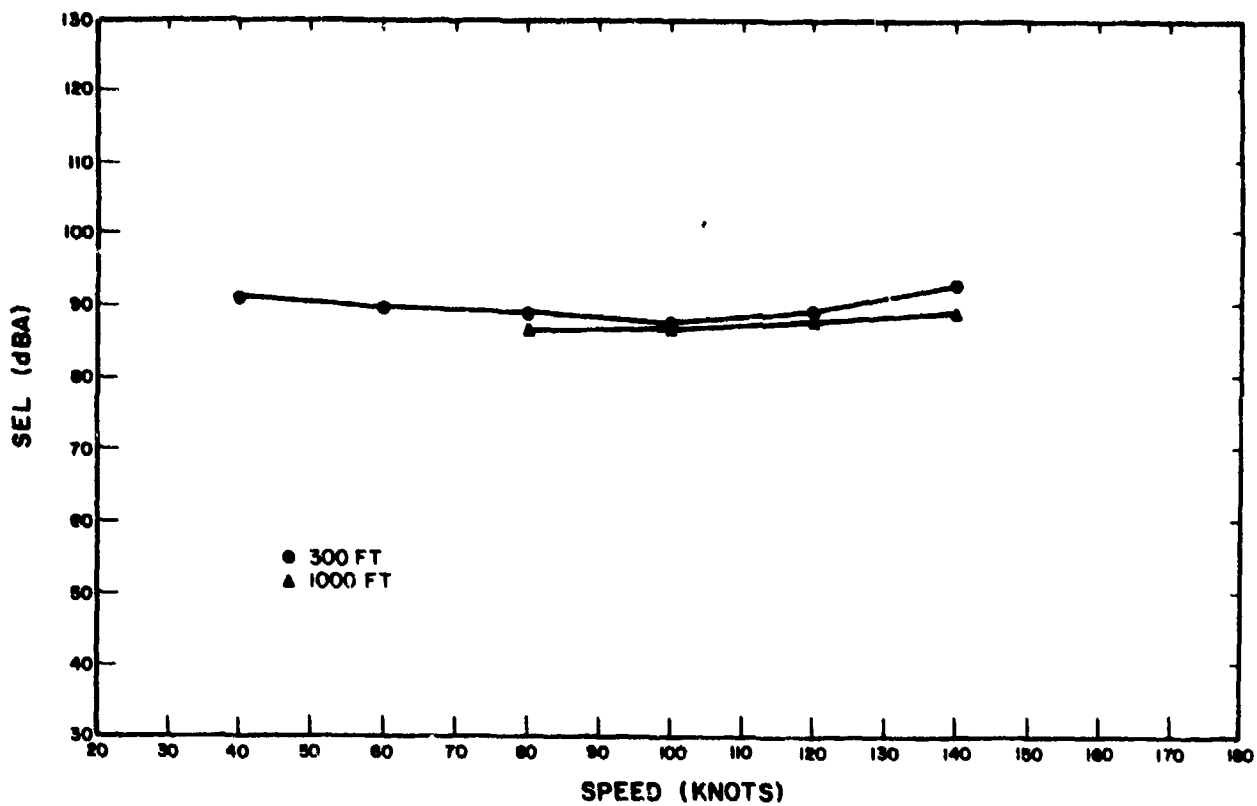


Figure 18. CH-47C—variation of SEL + 10 log (v/100 knots) with speed at 500 ft (300- and 1000-ft flyovers).

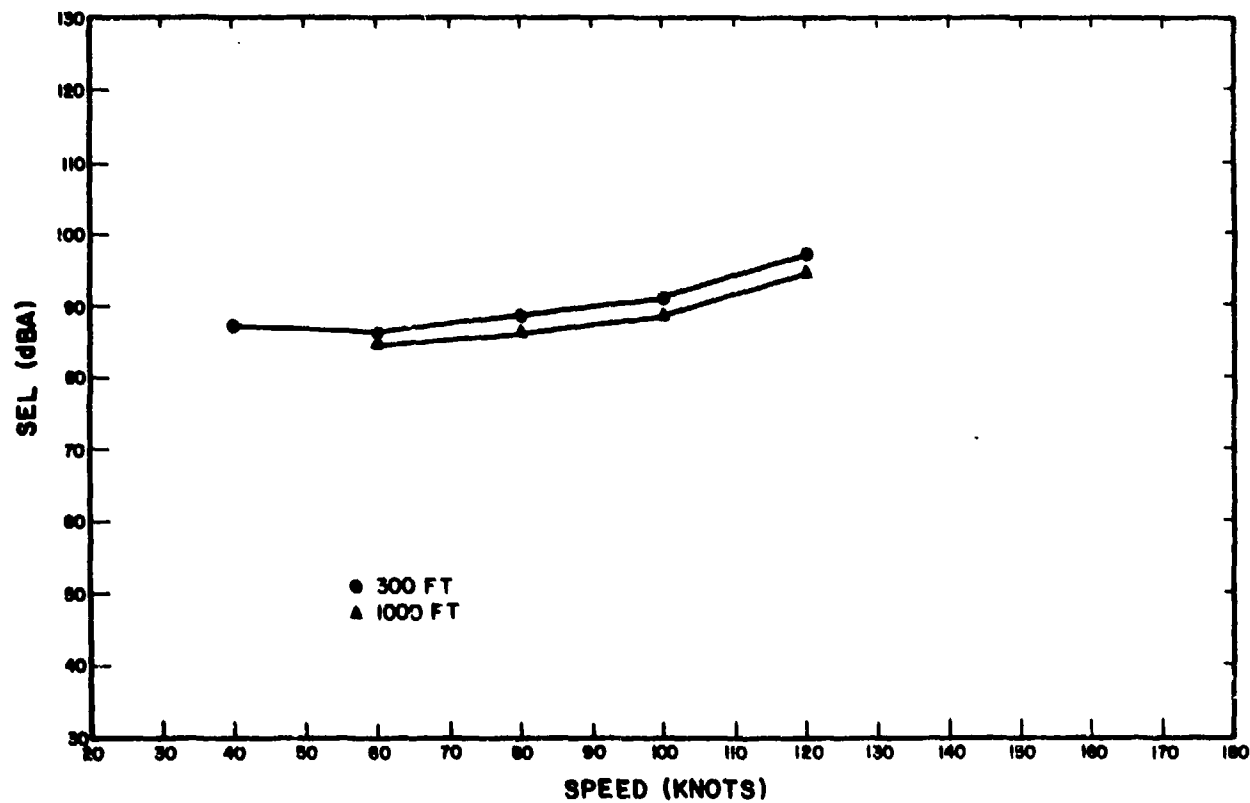


Figure 19. UH-1H—variation of SEL + 10 log (v/100 knots) with speed at 500 ft (300- and 1000-ft flyovers).

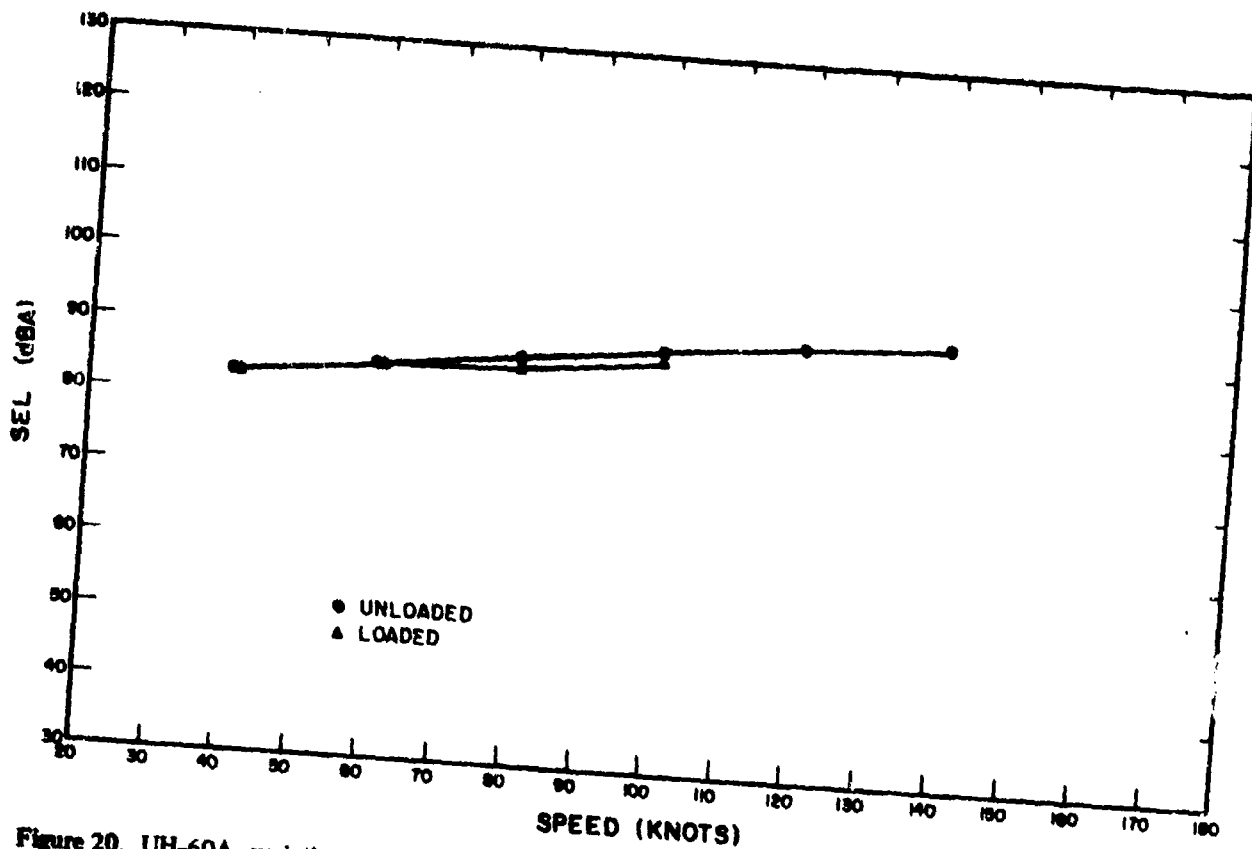


Figure 20. UH-60A—variation of SEL + 10 log (v/100 knots) with speed at 500 ft (loaded and unloaded flyovers).

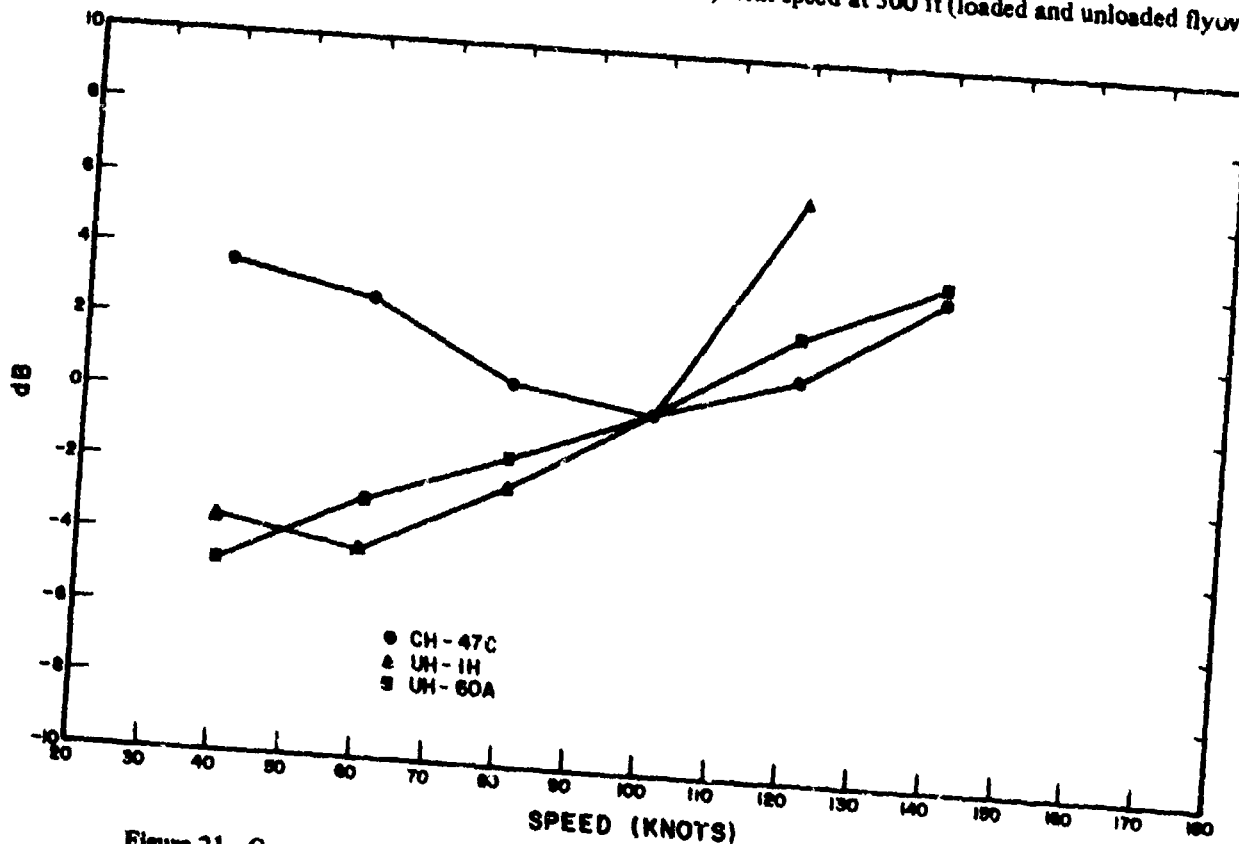


Figure 21. Composite curves of variation of SEL + 10 log (v/100 knots) with speed at 500 ft.

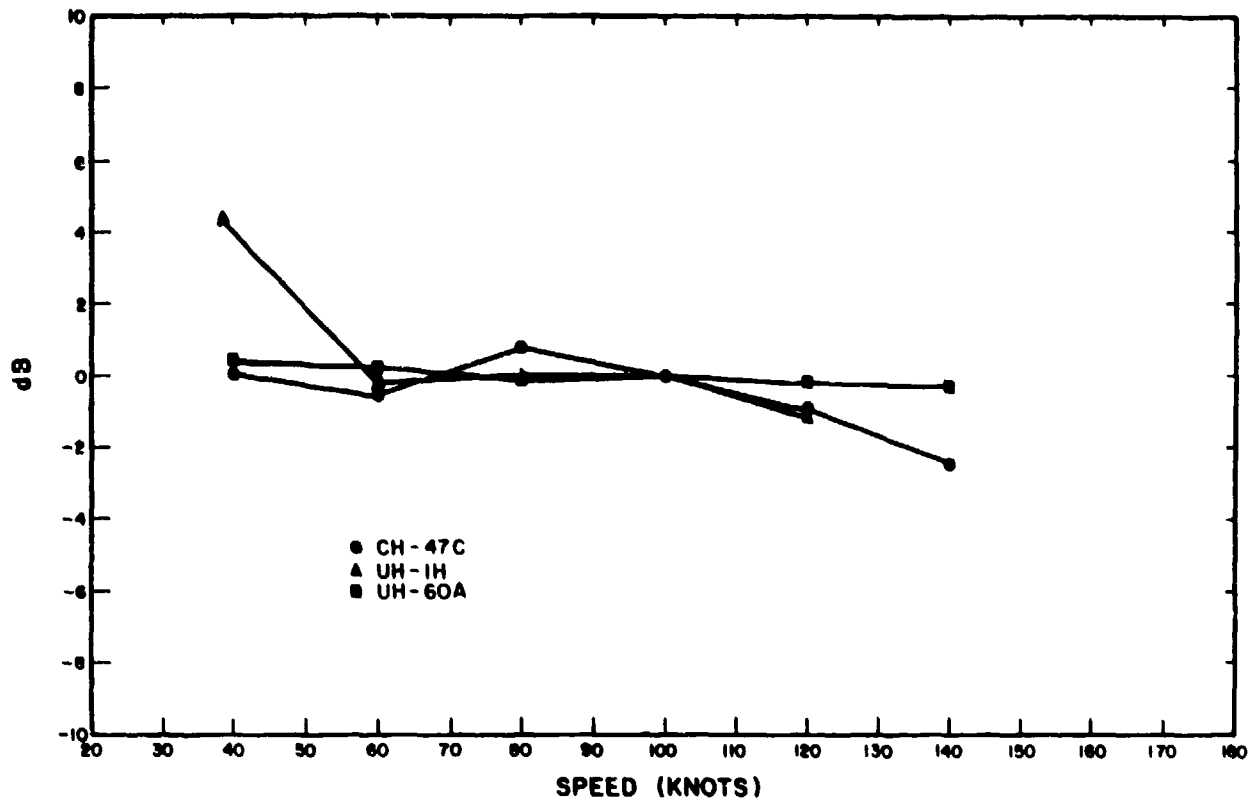


Figure 22. Difference of L_{eq} versus speed and $SEL + 10 \log(v/100 \text{ knots})$ at 500 ft.

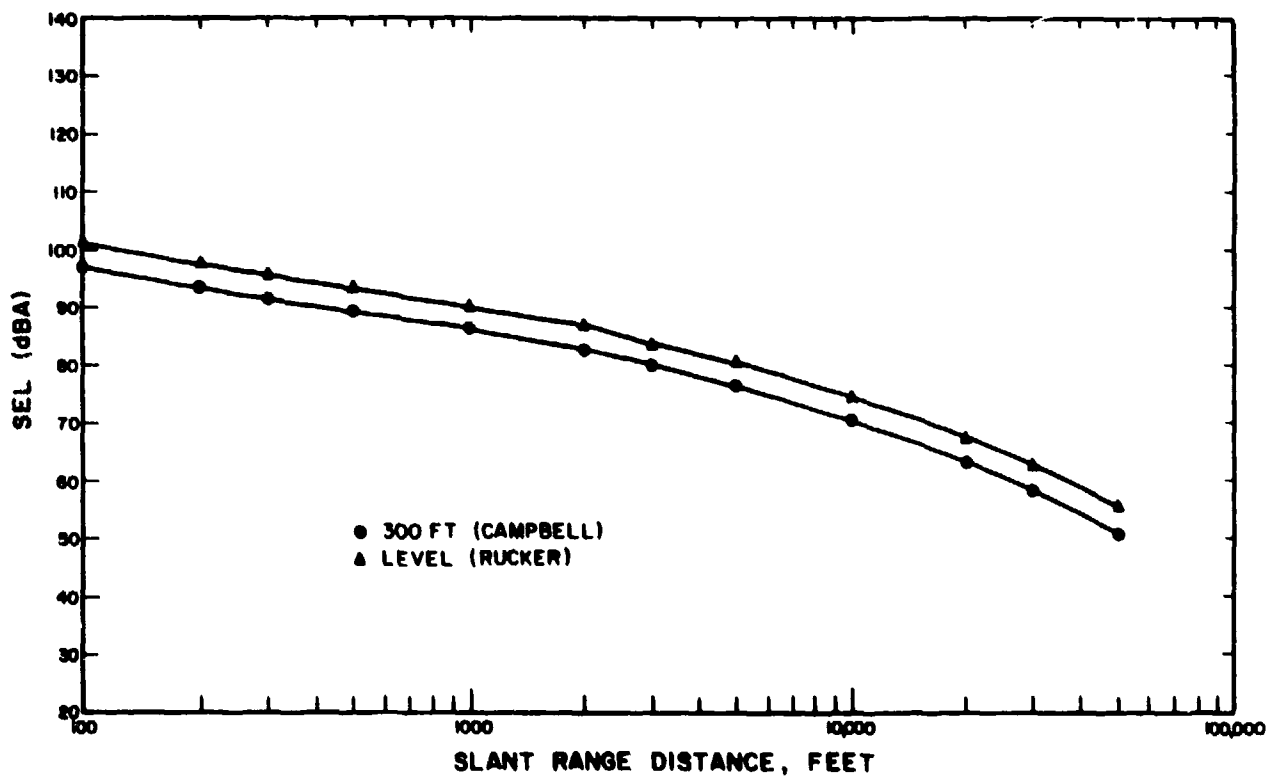


Figure 23. UH-1H—variation of SEL with distance at 80 knots (level flyovers).

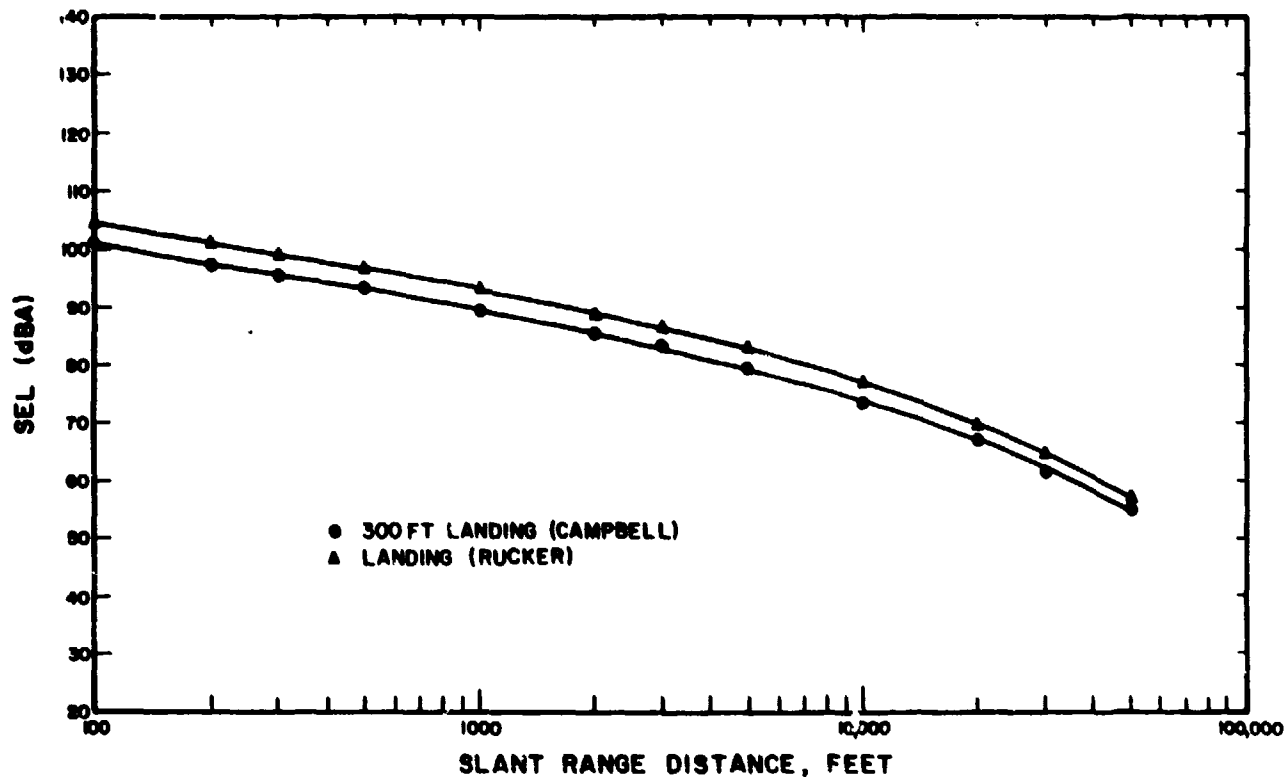


Figure 24. UH-1H-variation of SEL with distance at 80 knots (landings).

METRIC CONVERSIONS

- 1 ft = 0.3 m
- 1 in. = 25.4 mm
- 1 gal = 4.5 L
- 1 knot = 30.85 m/sec
- $\frac{^{\circ}\text{F}-32}{1.8} = ^{\circ}\text{C}$

**APPENDIX A:
PILOT'S LOG**

This appendix contains typical pilot's log pages for level flyover, landings, hovers, and takeoffs—operations 14, 15, 16, 17, and 18. (For a list of operations, see Table 3.)

LEVEL FLYOVER
 GT _____
 SPEED: _____ KNOTS
 ALT: _____ AGL

RADIO CALLS AT EACH 1/2 NAUTICAL MILE TURN
 (1) STARTING TURN
 (2) TURN COMPLETE, STARTING RUN

Figure A1. Instruction sheet for a level flyover—Operation 14.

14. LEVEL FLYOVER - GT 100°

Altitude 300 feet AGL

Speed 100 knots

Heading _____

Run Initiation Time 1023

Rotor RPM 235

Torque 32%

% N₁ 85-8

Engine Exhaust Gas Temp 620-630

Indicated Air Speed 100

Fuel Weight 3650

Outside Air Temp 24°C

Figure A2. Pilot's entries for level flyover.

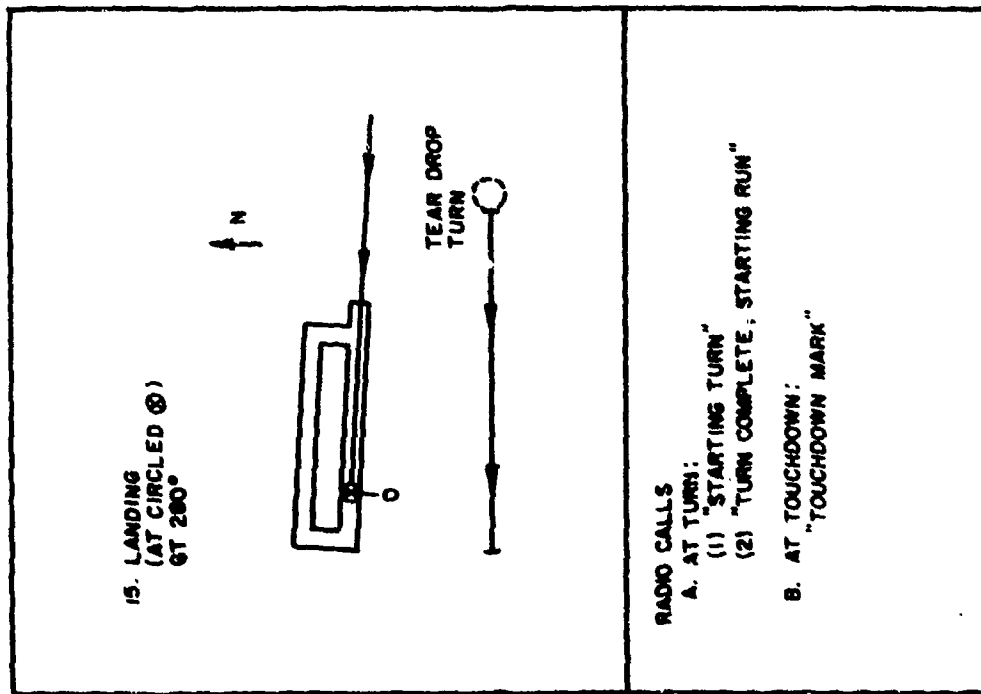


Figure A3. Instruction sheet for landing—Operation 15.

15. LANDING

Heading 280

At 1 1/2 miles before runway, after turn,
radio "Mark"

At touchdown, radio another "Mark"

Touchdown Time 1026

Engine Exhaust Gas Temp 560-600

Fuel Weight 3450

Indicated Air Speed 0

Figure A4. Pilot's entries for landing.

- 16. IN-GROUND EFFECT HOVER
- 17. OUT-OF-GROUND EFFECT HOVER



- A. MOVE 200 FT. ALONG RUNWAY FROM LANDING POINT, ⊕, TO PLUS SIGN, +
- B. TOUCHDOWN WITH ENGINES ON
- C. BEGIN IN-GROUND HOVER ON RADIO COMMAND
- D. BEGIN OUT-OF-GROUND HOVER ON RADIO COMMAND

	16. In-Ground Effect Hover	17. Out-of-Ground Effect Hover
Altitude	10'	50'
Heading	100	100
Rotor RPM	235	235
Torque	40%	44%
% N ₁	87-86	88-87
Engine Exhaust Gas Temp	640-660	650-670
Fuel Weight	3400	3350
Time	1027	1030

Figure A5. Instruction sheet for hovers—Operations 16 and 17.

Figure A6. Pilot's entries for hovers.

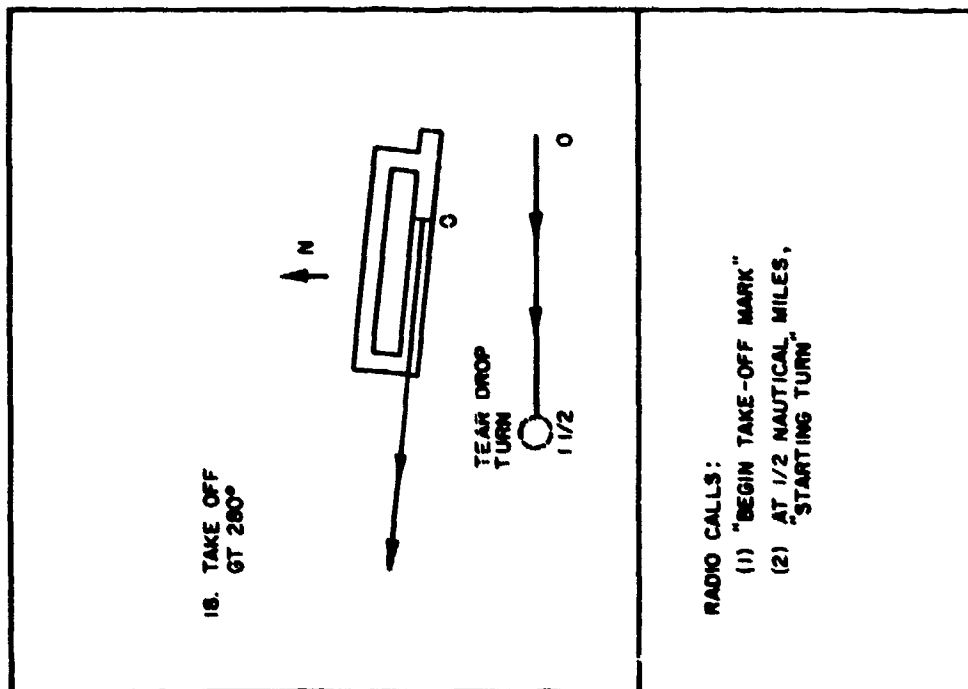


Figure A7. Instruction sheet for takeoff—Operation 18.

18. TAKEOFF

Heading 2
 Engine Exhaust Gas Temp 630-660
 Fuel Weight 3150
 Indicated Air Speed 50
 Time 1040

Figure A8. Pilot's entries for takeoff.

**APPENDIX B:
HOVER DATA**

**Table B1
UH-1H Hover Data (dB)**

Set	Heading (degrees)	Type	Microphone										
			1	11	3	12	13	14	5	15	2	6	4
1	100	IGE	73.2	69.6	80.2	71.4	70.2	-	73.9	71.5	85.6	75.4	62.6
1	100	OGE	87.3	87.4	81.3	77.0	76.2	-	86.4	87.1	91.6	88.7	71.1
2	50	IGE	77.7	72.6	75.9	76.1	80.6	77.1	77.8	77.0	79.3	80.9	71.7
2	50	OGE	81.9	79.5	79.9	80.4	81.5	80.5	84.5	80.1	83.9	82.8	75.0

**Table B2
UH-60A Hover Data—Unloaded (dB)**

Set	Heading (degrees)	Type	Microphone										
			1	11	3	12	13	14	5	15	2	6	4
3	95	IGE	78.1	-	70.7	75.0	77.4	74.7	77.8	74.3	81.2	81.1	70.7
3	95	OGE	82.9	-	79.4	80.3	82.5	77.8	86.8	82.7	83.1	88.3	75.4
4	280	IGE	76.7	76.2	75.7	77.6	76.0	78.0	76.8	79.1	81.1	80.9	72.2
4	280	OGE	76.3	80.7	78.3	80.1	83.8	81.4	83.5	79.4	81.6	81.2	74.0

**Table B3
UH-60A Hover Data—Loaded (dB)**

Set	Heading (degrees)	Type	Microphone										
			1	11	3	12	13	14	5	15	2	6	4
3	95	IGE	84.9	-	-	80.7	80.8	81.3	86.9	88.7	-	90.3	75.7
3	95	OGE	88.3	-	-	81.9	81.2	79.0	87.5	92.1	-	93.0	74.4
4	280	IGE	83.5	81.6	78.4	82.6	81.2	80.2	83.2	79.1	86.0	81.5	76.8
4	280	OGE	83.2	82.3	77.5	80.8	80.8	81.4	85.5	82.4	85.8	85.3	75.9

**Table B4
CH-47C Hover Data (dB)**

Set	Heading (degrees)	Type	Microphone										
			1	11	3	12	13	14	5	15	2	6	4
5	100	IGE	83.0	74.3	76.0	81.0	84.0	88.2	86.7	85.4	81.6	77.1	84.3
5	100	OGE	81.7	77.6	82.9	84.8	85.8	87.8	89.2	88.6	83.6	78.8	92.1
6	100	IGE	72.1	76.9	74.8	80.3	84.6	83.5	87.0	78.7	78.8	79.3	75.1
6	100	OGE	82.0	83.7	81.3	84.9	83.3	88.4	87.1	85.4	85.4	87.4	79.0

Table B5
Energy Averages of Fort Campbell Single-Rotor Aircraft by Degrees
With Respect to the Aircraft (0° Is Front of Aircraft); Table B1 Through B3 Data

	Average	180	225	270	315	0	45	90	135
UH-1H									
IGE	76.7	75.5	75.3	77.9	74.2	74.1	80.6	75.8	75.1
OGE	83.4	85.0	85.5	80.5	78.7	78.8	81.5	84.4	86.0
UH-60A									
IGE	76.8	77.2	78.0	74.8	77.5	77.1	77.5	76.9	76.3
OGE	81.9	83.4	81.4	81.9	79.9	80.4	79.5	84.4	81.6
Loaded	84.0	85.5	82.0	78.0	81.6	81.0	80.6	86.1	88.2

Table B6
Difference From Average; Table B5 Data

	Average	180	225	270	315	0	45	90	135
UH-1H									
IGE	0.0	-1.2	-1.4	+1.2	-2.5	-2.6	+3.9	-0.9	-1.0
OGE	0.0	+1.6	+2.1	-2.9	-4.7	-4.6	-1.9	+1.0	+2.6
UH-60A									
IGE	0.0	+0.4	+1.2	-2.0	+0.7	+0.3	-1.3	+0.1	-0.5
OGE	0.0	+1.5	-0.5	0.0	-2.0	-1.5	-2.4	+2.5	-0.3
Loaded	0.0	+1.5	-2.0	-6.0	-2.4	-3.0	-3.4	+2.1	+4.2

Table B7
Weighted Average of Single-Rotor Aircraft Directivity Change

	Number of Aircraft	Average	180	225	270	315	0	45	90	135
Fort Rucker Data*	63	0.0	+0.9	+0.2	-1.3	-1.8	-2.0	-0.1	+1.1	+1.5
Fort Campbell Data**	12	0.0	+1.1	+2.5	-0.2	-2.5	-2.8	-1.9	-1.0	+1.4
Overall Average	75	0.0	+1.1	+2.2	-0.4	-2.4	2.7	-1.6	-0.6	-1.4

*From p 39 of CERL Technical Report N-38.

**From Table B6.

Table B8
Energy Averages of Fort Campbell Dual-Rotor Aircraft by Degrees
With Respect to the Aircraft (0° Is Front of Aircraft); Table B4 Data

	Average	180	225	270	315	0	45	90	135
CH-47C IGE	83.3	80.3	75.8	75.5	80.7	84.3	86.5	86.9	83.2
CH-47C OGE	85.6	81.9	81.6	82.2	84.9	84.7	88.1	88.3	87.3

Table B9
Difference From Average; Table B8 Data

	Average	180	225	270	315	0	45	90	135
CH-47C IGE	0.0	-3.0	-7.5	-7.8	-2.6	+1.0	+3.2	+3.6	-0.1
CH-47C OGE	0.0	-3.7	-4.0	-3.4	-0.7	-0.9	+2.5	+2.7	+1.7

Table B10
Weighted Average of Dual-Rotor Aircraft Directivity Change

	Number of Aircraft	Average	180	225	270	315	0	45	90	135
Fort Rucker Data*	4	0.0	-3.3	-5.4	-5.1	-1.5	+0.2	+2.9	+3.2	+0.9
Fort Campbell Data**	4	0.0	-1.1	-1.4	-2.0	-0.8	+0.1	+2.6	+1.6	-1.1
Overall Average	8	0.0	-2.1	-3.0	-3.3	-1.1	+0.2	+2.8	+2.5	0.0

*From CERL Technical Report N-38.

**From Table B9.

**APPENDIX C:
DATA FOR FIGURES 8 THROUGH 22**

**Table C1
Variation of SEL With Distance at 100 Knots (Figures 8 and 9)**

	100	200	300	500	1K	2K	3K	5K	10K	20K	30K	50K
UH-60A												
Unloaded	95.9	92.8	90.9	88.4	84.9	80.8	78.1	74.2	67.7	59.6	53.8	45.6
Loaded	94.5	91.5	89.5	87.1	83.5	79.6	76.9	73.1	66.8	58.8	53.2	45.2
Unloaded Landing	100.3	97.2	95.3	92.8	89.1	84.9	82.1	77.9	71.0	62.3	56.5	48.4
Loaded Landing	106.2	103.0	101.1	98.6	94.8	90.4	87.4	82.9	75.2	65.5	59.1	50.9
CH-47C												
300 ft	94.9	91.8	90.0	87.6	84.2	80.4	78.0	74.6	69.4	63.0	58.5	51.8
1000 ft	93.9	90.8	89.0	86.6	83.1	79.4	76.9	73.6	68.5	62.3	58.0	51.3
300 ft Landing	106.9	103.8	102.0	99.6	96.2	92.4	89.9	86.3	80.5	73.2	68.1	60.8

**Table C2
Variation of SEL With Speed at 500 ft (Figures 10 Through 13)**

	40	60	80	100	120	140
CH-47C						
300 ft.	94.8	92.1	89.8	87.6	88.1	90.9
1000 ft.			87.5	86.6	86.8	87.4
UH-1H						
300 ft.	91.5	88.9	89.6	90.9	96.3	
1000 ft.		87.4	87.5	88.8	94.1	
UH-60A						
Unloaded	87.1	87.2	87.7	88.4	89.3	90.3
Loaded	87.1	87.1	86.8	87.1		
Composite (Normalized to 100 Knots)						
CH-47C	7.7	5.0	0.0	0.4	2.4	
UH-1H	1.5	-1.8	-1.3	0.0	5.3	
UH-60A	-0.7	-0.6	-0.5	0.0	1.5	2.5

**Table C3
Variation of L_{eq} With Speed at 500 ft (Figures 14 Through 17)**

	40	60	80	100	120	140
CH-47C						
300 ft.	84.1	82.7	82.1	79.4	79.6	84.2
1000 ft.			80.6	81.3	81.6	78.9
UH-1H						
300 ft.	83.1	78.7	80.3	83.1	87.6	
1000 ft.		78.7	80.4	82.2	87.5	
UH-60A						
Unloaded	76.5	78.7	79.6	81.3	83.0	84.6
Loaded	76.6	77.9	78.9	80.4		
Composite (Normalized to 100 Knots)						
CH-47C	3.6	2.2	0.9	0.0	0.2	1.8
UH-1H	0.4	-4.0	-2.3	0.0	4.9	
UH-60A	-4.3	-2.6	-1.6	0.0	2.1	3.7

Table C4
Variation of SEL + 10 log (v/100 knots) With Speed at 500 ft (Figures 18 Through 21)

	40	60	80	100	120	140
CH-47C						
300 ft.	90.8	89.9	88.8	87.6	88.9	92.4
1000 ft.			86.5	86.6	87.6	88.9
UH-1H						
300 ft.	86.3	86.7	88.6	90.9	97.1	
1000 ft.		85.2	86.5	88.8	94.9	
UH-60A						
Unloaded	83.1	85.0	86.7	88.4	90.1	91.8
Loaded	83.1	84.9	85.8	87.1		
Composite (Normalized to 100 Knots)						
CH-47C	3.7	2.8	0.7	0.0	1.3	3.9
UH-1H	-3.7	-4.0	-2.3	0.0	6.1	
UH-60A	-4.7	-2.8	-1.5	0.0	2.3	4.0

Table C5
Difference of L_{eq} With Speed Versus SEL + 10 log (v/100 knots) With Speed at 500 ft (Figure 22)

	40	60	80	100	120	140
CH-47C	-0.1	-0.6	0.2	0.0	-1.1	-2.1
UH-1H	4.1	0.0	0.0	0.0	-1.2	
UH-60A	0.4	0.2	-0.1	0.0	-0.2	-0.3

CEKL DISTRIBUTION

Chief of Engineers
 ATTN: Tech Monitor
 ATTN: DAEN-ABI-L (2)
 ATTN: DAEN-CCP
 ATTN: DAEN-CW
 ATTN: DAEN-CWE
 ATTN: DAEN-CWR
 ATTN: DAEN-CWO
 ATTN: DAEN-CWP
 ATTN: DAEN-HP
 ATTN: DAEN-MPC
 ATTN: DAEN-MPC
 ATTN: DAEN-MPO
 ATTN: DAEN-MPR-A
 ATTN: DAEN-RD
 ATTN: DAEN-RDC
 ATTN: DAEN-RDM
 ATTN: DAEN-RH
 ATTN: DAEN-ZC
 ATTN: DAEN-ZCE
 ATTN: DAEN-ZCI
 ATTN: DAEN-ZCM

FESA, ATTN: Library 22060

FESA, ATTN: DET III 79908

US Army Engineer Districts

ATTN: Library
 Alaska 98501
 Al Batin 08618
 Albuquerque 87103
 Baltimore 21203
 Buffalo 14207
 Charleston 29402
 Chicago 60604
 Detroit 48231
 Far East 98301
 Fort Worth 78102
 Galveston 77550
 Huntington 25721
 Jacksonville 32232
 Japan 98343
 Kansas City 64106
 Little Rock 72203
 Los Angeles 90053
 Louisville 40201
 Memphis 38103
 Mobile 36628
 Nashville 37202
 New Orleans 70160
 New York 10007
 Norfolk 23510
 Omaha 68102
 Philadelphia 19108
 Pittsburgh 15222
 Portland 97208
 Riyadh 09036
 Rock Island 61201
 Sacramento 95814
 San Francisco 94105
 Savannah 31402
 Seattle 98124
 St. Louis 63101
 St. Paul 55101
 Tulsa 74102
 Vicksburg 39180
 Walls Walls 98362
 Wilmington 28401

US Army Engineer Divisions

ATTN: Library
 Europe 08757
 Huntsville 35807
 Lower Mississippi Valley 39180
 Middle East 08038
 Middle East (Rear) 28601
 Missouri River 68101
 New England 02154
 North Atlantic 10007
 North Central 60605
 North Pacific 97208
 Ohio River 45201
 Pacific Ocean 98858
 South Atlantic 30303
 South Pacific 84111
 Southwestern 75202

US Army Europe

HD, 7th Army Training Command 08114
 ATTN: AETTG-DEH (5)
 HD, 7th Army ODCS/Engr. 08403
 ATTN: AEAEN-EH (4)
 V. Corps 08079
 ATTN: AETVDEH (5)
 VII. Corps 08154
 ATTN: AETSDEH (5)
 21st Support Command 08325
 ATTN: AEREH (5)
 Berlin 08742
 ATTN: AEDA-EH (2)
 Southern European Tank Force 09188
 ATTN: AEBE-ENG (3)
 Installation Support Activity 08403
 ATTN: ABUES-PP

8th USA, Korea
 ATTN: EAFE (S) 98301
 ATTN: EAFE-Y 98358
 ATTN: EAFE-ID 98284
 ATTN: EAFE-AM 98288
 ATTN: EAFE-H 98271
 ATTN: EAFE-P 98250
 ATTN: EAFE-T 98212

Rocky Mt. Arsenal, SARRM-18 80022

Area Engineer, AEDC-Area Office
 Arnold Air Force Station, TN 37389

Western Area Office, CE
 Vandenberg AFB, CA 93437

418th Engineer Command 80823
 ATTN: Facilities Engineer

USA Japan (USARJ)
 Ch, FE Div, AJEN-FE 98343
 Far Engr (Honahu) 98343
 Far Engr (Okinawa) 98331

ROK/US Combined Forces Command 98301
 ATTN: EUSA-MHC-CFC/Engr

US Military Academy 10985
 ATTN: Facilities Engineer
 ATTN: Dept of Geography &
 Computer Science
 ATTN: DDCPER/MAEN-A

Engr. Studies Center 20315
 ATTN: Library

AMNRC, ATTN: DRDWR-WE 02172

USA ARRCOM 61299
 ATTN: DRCS-RI-1
 ATTN: DRBAR-18

DARCOM - Dir., Inet., & Svcs.
 ATTN: Facilities Engineer

ARRADCOM 07801
 Aberdeen Proving Ground 21005
 Army Mater. and Mechanics Res. Ctr.
 Corpus Christi Army Depot 78419
 Harry Diamond Laboratories 20703
 Dugway Proving Ground 84622
 Jefferson Proving Ground 47250
 Fort Monmouth 07703
 Letterkenny Army Depot 17201
 Natick RAD Ctr. 01780
 New Cumberland Army Depot 17070
 Pueblo Army Depot 81001
 Red River Army Depot 75501
 Redstone Arsenal 35899
 Rock Island Arsenal 61299
 Savannah Army Depot 31074
 Sharps Army Depot 98331
 Seneca Army Depot 14841
 Tobyhanna Army Depot 18466
 Tooele Army Depot 84074
 Watervliet Arsenal 12189
 Yuma Proving Ground 95364
 White Sands Missile Range 88002

DLA ATTN: DLA-WI 22314

FORSCOM

FORSCOM Engineer, ATTN: AFEN-EE
 ATTN: Facilities Engineer
 Fort Buchanan 00834
 Fort Bragg 28307
 Fort Campbell 42223
 Fort Carson 80813
 Fort Devens 01433
 Fort Drum 13601

FORSCOM

ATTN: Facilities Engineer
 Fort Hood 76844
 Fort Indiantown Gap 17003
 Fort Irwin 92311
 Fort Sam Houston 78234
 Fort Lewis 98433
 Fort McCoy 54886
 Fort Monmouth 30330
 Fort George G. Meade 20725
 Fort Ord 93941
 Fort Polk 71488
 Fort Richardson 98508
 Fort Riley 66442
 Presidio of San Francisco 94120
 Fort Sheridan 60037
 Fort Stewart 31312
 Fort Wainwright 99703
 Vancouver Bks. 98650

MHC

ATTN: HRLD-F 78234
 ATTN: Facilities Engineer
 Fitzsimons Army Medical Center 80940
 Walter Reed Army Medical Center 20012

INSCOM - Ch. Inet. Div.

ATTN: Facilities Engineer
 Arlington Hall Station (2) 22212
 Vint Hill Farms Station 22188

MDW

ATTN: Facilities Engineer
 Cameron Station 22314
 Fort Lesley J. McNair 20319
 Fort Myer 22211

MTMC

ATTN: MTMC-SA 20315
 ATTN: Facilities Engineer
 Oakland Army Base 94626
 Bayonne MOT 07002
 Sunny Point MOT 28461

NARADCOM, ATTN: DRDNA-F 07160

TARCOM, Fac. Div. 48080

TECOM, ATTN: DRSTE-LG-F 21005

TRADOC

HQ, TRADOC, ATTN: ATEH-FE
 ATTN: Facilities Engineer
 Fort Belvoir: 22060
 Fort Benning 31905
 Fort Bliss 79816
 Carlisle Barracks 17013
 Fort Chaffee 72902
 Fort Dix 08640
 Fort Eustis 23804
 Fort Gordon 30905
 Fort Hamilton 11262
 Fort Benjamin Harrison 48216
 Fort Jackson 29207
 Fort Knox 40121
 Fort Leavenworth 66027
 Fort Lee 23801
 Fort McCallan 38205
 Fort Monroe 23851
 Fort Rucker 36362
 Fort Sill 73503
 Fort Leonard Wood 65473

TSARCOM, ATTN: STSAS-F 63128

USACC
 ATTN: Facilities Engineer
 Fort Huachuca 85613
 Fort Ritchie 21719

WESTCOM

ATTN: Facilities Engineer
 Fort Shafter 96868

SHAPE 39055
 ATTN: Survivability Section, COB-OPB
 Infrastructure Branch, LAMDA

HQ USEJCOM 09128
 ATTN: ECJ 4/7-LOE

Fort Belvoir, VA 22060

ATTN: ATZA-DTE-EM
 ATTN: ATZA-D1E-SW
 ATTN: ATZA-FS
 ATTN: Engr. Library
 ATTN: Canadian Liaison Office (2)
 ATTN: IWR Library

Cold Regions Research Engineering Lab 03785
 ATTN: Library

ETL, ATTN: Library 22060

Waterways Experiment Station 39180
 ATTN: Library

HQ, XVIII Airborne Corps and 28307

Ft. Bragg
 ATTN: AFZA-FE-EE

Chanute AFB, IL 61868
 3348 CBG/DE, Stop 27

Morton AFB 82409
 ATTN: AFRCE-MX/DEE

NCEL 93041
 ATTN: Library (Code LOGA)

Tyndall AFB, FL 32833
 AFESC/Engineering & Servis; Lab

Defense Technical Info. Center 22314
 ATTN: DDA (12)

Engineering Societies Library 1001/
 New York, NY

National Guard Bureau 20310
 Installation Division

US Government Printing Office 22304
 Receiving Section/Depository Copies (2)

FNA Team Distribution

Chief of Engineers
 ATTN: DAEN-MPC-E
 ATTN: DAEN-MPE-B
 ATTN: DAEN-MPE-I (2)
 ATTN: DAEN-MPO-B
 ATTN: DAEN-MPZ-A
 ATTN: DAEN-ZCE-D (2)

US Army Engineer District
 New York 10007
 ATTN: Chief, Design Br
 Philadelphia 19106
 ATTN: Chief, NAPEN-E
 Baltimore 21203
 ATTN: Chief, Engr Div
 Norfolk 23510
 ATTN: Chief, NAOEN-D
 Huntington 25721
 ATTN: Chief, ORHED
 Wilmington 28401
 ATTN: Chief, SAWEN-D
 Savannah 31402
 ATTN: Chief, SASAS-L
 Mobile 36628
 ATTN: Chief, SAMEN-D
 Louisville 40201
 ATTN: Chief, Engr Div
 St. Paul 55101
 ATTN: Chief, ED-D
 Chicago 60604
 ATTN: Chief, MCCPE-PES
 Rock Island 61201
 ATTN: Chief, Engr Div
 St. Louis 63101
 ATTN: Chief, ED-D
 Omaha 68102
 ATTN: Chief, Engr Div
 New Orleans 70160
 ATTN: Chief, LMNED-DG
 Little Rock 72203
 ATTN: Chief, Engr Div
 Tulsa 74102
 ATTN: Chief, Engr Div
 Ft. Worth 76102 (2)
 ATTN: Chief, SWFED-D
 San Francisco 94105
 ATTN: Chief, Engr Div
 Sacramento 95814
 ATTN: Chief, SPKED-D
 Far East 96301
 ATTN: Chief, Engr Div
 Seattle 98124
 ATTN: Chief, EH-DB-ST
 Walla Walla 99362
 ATTN: Chief, Engr Div
 Alaska 99501
 ATTN: Chief, NPASA-R

US Army Engineer Division
 New England 02154
 ATTN: Chief, NEDED-T
 North Atlantic 10007
 ATTN: Chief, NADEN-T
 Middle East (Rear) 22601
 ATTN: Chief, MEDED-T
 South Atlantic 30303
 ATTN: Chief, SADEN-TS
 Huntsville 35807
 ATTN: Chief, HNOED-CS
 ATTN: Chief, HNOED-SR
 Ohio River 45201
 ATTN: Chief, Engr Div
 Missouri River 68101
 ATTN: Chief, MRDED-T
 Southwestern 75202
 ATTN: Chief, SWDED-T
 South Pacific 94111
 ATTN: Chief, SPDED-TG
 Pacific Ocean 96858
 ATTN: Chief, Engr Div
 North Pacific 97208

6th US Army 94129
 ATTN: AFKC-EN
 7th Army Comb. Trng. Cntr. 09407
 ATTN: AETTM-HRD-ENO

Armament & Dev. Command 21005
 ATTN: DRDAR-BLT

USA ARRADCOM 07801
 ATTN: DRDAR-LCA-OK

DARCOM 22333
 ATTN: DRCPA
 ATTN: DRCIS-A

TRADOC
 Ft. Monroe, VA 23651

Ft. Clayton, Canal Zone 34004
 ATTN: DFAE

Ft. Detrick, MD 21701

Ft. Leavenworth, KS 66027
 ATTN: ATZLCA-SA

Ft. McPherson, GA 30330 (2)

Ft. Monroe, VA 23651 (6)

Ft. Rucker, AL 36360 (2)

Aberdeen Proving Ground, MD 21005
 ATTN: DRDAR-BLL
 ATTN: STEAP-MT-E

Human Engineering Lab. 21005 (2)

USA-WES 39181

Army Environmental Hygiene Agency 21005

Naval Air Station 92135
 ATTN: Code 661

NAVFAC 22332 (2)

Naval Air Systems Command 20360

US Naval Oceanographic Office 39522

Naval Surface Weapons Center 22485
 ATTN: N-43

Naval Undersea Center, Code 401 92152 (2)

Bolling AFB, DC 20332
 AF/LEEEU

Patrick AFB, FL 32925
 ATTN: XRQ

Tyndall AFB, FL 32403
 AFESC/TST

Wright-Patterson AFB, OH 45433 (3)

Building Research Advisory Board 20418

Transportation Research Board 20418

Dept of Housing and Urban Development 20410

Dept of Transportation Library 20590

Illinois EPA 62706 (2)

Federal Aviation Administration 20591

Federal Highway Administration 22201
 Region 15

NASA 23365 (2)

National Bureau of Standards 20234

Office of Noise Abatement 20590
 ATTN: Office of Secretary

USA Logistics Management Center 23801

Airports and Construction Services Dir
 Ottawa, Ontario, Canada K1A 0M8

Division of Building Research
 Ottawa, Ontario, Canada K1A 0R6

National Defense HQDA
 Ottawa, Ontario, Canada K1A 0K2

109

+23

2-11-82

Schomer, Paul D.

Operational noise data for UH-60A and CH-47C Army helicopters. -- Champaign, IL : Construction Engineering Research Laboratory ; Springfield, VA : available from NTIS, 1982.

42 p. (Technical report / Construction Engineering Research Laboratory ; N-131)

I. Helicopters -- noise. I. Title. II. Series : Technical report (Construction Engineering Research Laboratory (U.S.)) ; N-131.